INSTALLATION & OPERATING INSTRUCTIONS

84 Professional Gas-Fired Pool & Spa Heater

Low NOx Models
259 & 409

HLW

WARNING: If these instructions are not followed exactly, a fire or explosion may result causing property damage, personal injury or death.

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

WHAT TO DO IF YOU SMELL GAS:

- **Do not try to light any appliance.**
- **Do not touch any electrical switch; do not use any phone in your building.**
- **Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.**
- **If you cannot reach your gas supplier, call the fire department.**

Installation and service must be performed by a qualified installer, service agency or the gas supplier.

This manual should be maintained in legible condition and kept adjacent to the heater or in a safe place for future reference.

Catalog No. 6000.65A Effective: 12-06-12 Replaces: 05-17-12 P/N 241464 Rev. 2

WATER CHEMISTRY
(Corrosive water voids all warranties)

For your health and the protection of your pool equipment, it is essential that your water be chemically balanced. The following levels must be used as a guide for balanced water.

Recommended Level(s)	Fiberglass Pools	Fiberglass Spas	Other Pool & Spa Types
Water Temp. (Deg. F)	68 to 88	89 to 104	68 to 104
pH	7.3 to 7.4	7.3 to 7.4	7.6 to 7.8
Total Alkalinity (PPM)	120 to 150	120 to 150	80 to 120
Calcium Hardness (PPM)	200 to 300	150 to 200	200 to 400
Salt (PPM)	**4500 MAXIMUM**	**4500 MAXIMUM**	**4500 MAXIMUM**
Free Chlorine (PPM)*	2 to 3	2 to 3	2 to 3
Total Dissolved Solids (PPM)	**3000 MAXIMUM****	**3000 MAXIMUM****	**3000 MAXIMUM****

*** Free Chlorine MUST NOT EXCEED 5 PPM!**

** In salt water chlorinated pools, the total TDS can be as high as 6000 ppm.

- Occasional chemical shock dosing of the pool or spa water should not damage the heater providing the water is balanced.
- Automatic chemical dosing devices and salt chlorinators are usually more efficient in heated water, unless controlled, they can lead to excessive chlorine level **which can damage your heater, and which is not covered under warranty**. A check valve should be installed between the heater outlet and a chlorinator or other chemical dosing device.
- Further advice should be obtained from your pool or spa builder, accredited pool shop, or chemical supplier for the correct levels for your water.

Rev. 2 reflects the following:
Changes to: Contents on page 3, Introduction and Start-Up Procedure on page 5, Receiving Equipment on page 9, Loose Plumbing Parts diagram on page 9 (moved from page 30), Florida tie-down diagram on page 13, Specifications and Dimensions on page 14, Vent/Inlet Termination Clearances on page 15, Direct Vent instructions on page 16, Venting Category Requirements on page 17, Category I installation on pages 19-20, Horizontal Venting diagrams on page 21, Vertical Direct Vent diagram on page 22, Outdoor Installation on page 23, Plumbing Connections on page 28, Status and Diagnostics on page 37, Orifice Removal diagram on page 41, Igniter Removal on page 41, Troubleshooting on page 42, Control Logic flow chart on page 43, Illustrated Parts List on pages 44-46
Additions: Table and Direct Vent - Horizontal instructions on page 21, Piping diagrams on page 30, Gas and Air Orifice Selection on page 41
Deletions: None

CONTENTS

2 Water Chemistry
4 WARNINGS
4 Pay Attention to These Terms

5 PART ONE
OWNER'S OPERATING INSTRUCTIONS

5 SECTION 1
START-UP PROCEDURES

6 SECTION 2
CAUTION

6 SECTION 3
MAINTENANCE & CARE PROCEDURES

7 Lighting & Shutdown Instructions
8 Pool & Spa Water Chemistry
8 Automatic Chlorinators & Chemical Feeders
8 Cold Weather Operation
8 Winterizing the Pool & Spa Heater

9 PART TWO
INSTALLATION & SERVICE INSTRUCTIONS

9 SECTION 1
RECEIVING EQUIPMENT

10 SECTION 2
GENERAL SPECIFICATIONS

10 SECTION 3
INSTALLATION INSTRUCTIONS

10 Code Requirements
11 Clearances
11 Outdoor Heater Installation
13 Florida Building Code
14 Indoor Heater Installation
14 Specifications and Dimensions
16 Combustion and Ventilation Air
16 Direct Vent
17 Venting
18 Support of Vent Stack
18 Vent Terminal Location
19 Venting Installation Tips
19 Venting Configurations
19 Natural Draft Vertical Venting (Category I)
21 Horizontal Through-the-Wall Direct Venting (Category III)
22 Direct Vent - Vertical
23 Outdoor Installation
24 Gas Supply Connections
24 Gas Pressure Adjustment Locations
25 Pipe Sizing For Gas Connections
25 Flow Rates
25 Heat Exchanger Pressure Drop Tables
25 Internal Automatic Bypass Valve
25 External Auxiliary Bypass Valve
25 Auxiliary Bypass Valve Adjustment
26 Pressure Relief Valve Installation
26 Electrical Wiring
27 Transformer Wiring
28 Optional Left-Hand Wiring
28 Plumbing—Water Connections
32 Wiring Diagram

33 SECTION 4
SERVICING INSTRUCTIONS

33 General Location of Controls
34 Control Adjustments
34 Control Panel Removal
35 Thermostat Operation - Direct Spark Board
37 Status and Diagnostics
38 Remote Control Installation and Operation
38 Remote Operation
38 Activating the Remote
39 Remote Control Wiring
39 2-Wire Remote Control
39 3-Wire Remote Control
40 Time Clock / Fireman's Switch
40 High Limits
40 Flow Switch
40 Air Pressure & Blocked Vent Switches
41 Visual Inspection
41 Electrical
41 Orifice Removal
41 Igniter Removal

42 SECTION 5
TROUBLESHOOTING

42 Mechanical
43 Control Logic - Flow Chart

44 SECTION 6
REPLACEMENT PARTS

44 Illustrated Parts List
45 Part Numbers
47 Important Instructions for the Commonwealth of Massachusetts

WARNINGS—Pay Attention to These Terms

DANGER:	Indicates the presence of immediate hazards which will cause severe personal injury, death or substantial property damage if ignored.
WARNING:	Indicates the presence of hazards or unsafe practices which could cause severe personal injury, death or substantial property damage if ignored.
CAUTION:	Indicates the presence of hazards or unsafe practices which could cause minor personal injury or product or property damage if ignored.
NOTE:	Indicates special instructions on installation, operation, or maintenance which are important but not related to personal injury hazards.

DANGER: Failure to install the draft hood on indoor installations and properly vent the heater to the outdoors as outlined in the Venting section of this manual can result in unsafe operation of the heater. To avoid the risk of fire, explosion, or asphyxiation from carbon monoxide, never operate this heater unless it is properly vented and has an adequate air supply for proper operation. Be sure to inspect the vent system for proper installation at initial start-up; and at least annually thereafter. Refer to the Maintenance section of this manual for more information regarding vent system inspections.

DANGER: Make sure the gas on which the heater will operate is the same type as that specified on the heater rating plate.

DANGER: When servicing or replacing components that are in direct contact with the water, be certain that:
• There is no pressure in the heater. (Pull the release on the relief valve. Do not depend on the pressure gauge reading).
• The heater water is not hot.
• The electrical power is off.

WARNING: All venting types must be of the same material or product throughout the entire exhaust installation to ensure proper securing and sealing.

WARNING: Altering any Raypak pressure vessel by installing replacement heat exchangers, tube bundle headers, or any ASME parts not manufactured and/or approved by Raypak will instantly void the ASME and/or CSA ratings of the vessel and any Raypak warranty on the vessel. Altering the ASME and/or CSA ratings of the vessel also violates national, state, and local approval codes.

WARNING: Both natural gas and propane have an odorant added to aid in detecting a gas leak. Some people may not physically be able to smell or recognize this odorant. If you are unsure or unfamiliar with the smell of natural gas or propane, ask your local gas supplier. Other conditions, such as "odorant fade," which causes the odorant to diminish in intensity, can also hide, camouflage, or otherwise make detecting a gas leak by smell more difficult.

WARNING: UL recognized fuel gas detectors are recommended in all enclosed propane and natural gas applications wherein there is a potential for an explosive mixture of fuel gas to accumulate and their installation should be in accordance with the detector manufacturer's recommendations and/or local laws, rules, regulations, or customs.

WARNING - CALIFORNIA PROPOSITION 65: This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

WARNING: This product must be installed by a licensed plumber or gas fitter when installed within the Commonwealth of Massachusetts.

WARNING: Do not install within 3 feet of a heat pump or an outdoor condensing unit. Strong air intake from this type of equipment can disturb the combustion process and cause damage or personal injury.

WARNING: Do not use this heater if any part has been under water. Immediately call a qualified service technician to inspect the heater and to replace any part of the control system and any gas control which has been under water.

PART ONE
OWNER'S OPERATING INSTRUCTIONS

FOR YOUR SAFETY - READ BEFORE OPERATING
WARNING: IF YOU DO NOT FOLLOW THESE INSTRUCTIONS EXACTLY, A FIRE OR EXPLOSION MAY RESULT, CAUSING PROPERTY DAMAGE, PERSONAL INJURY OR LOSS OF LIFE.

INTRODUCTION

Your pool/spa heater has been designed for years of safe and reliable pool/spa water heating. It is available with electronic ignition. This manual provides installation, operation, maintenance, and service information for these heaters.

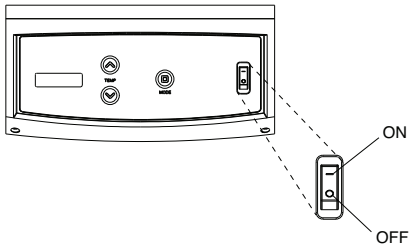

If your heater has been installed correctly, operating the heater is an easy task. The upper front panel of the heater contains the control center that allows you to turn the heater On or Off and adjust the temperature settings for the pool or spa. The temperature range is factory set from 50°F (18°C) to 104°F (40°C). See figure above for location of toggle switch to turn the heater On and Off. Section 4 of this manual contains more details about the use of the controls in the Control Adjustments subsection (page 34).

SECTION 1 - START-UP PROCEDURE

1. Clean air louvers of dust, lint and debris.
2. Keep heater area clear and free from combustibles, flammable liquids and chemicals.
3. Verify that the flow of combustion and ventilation air is not obstructed.
4. Water must be flowing through the heater during operation. Ensure that the system is filled with water and the pump is operating. Double check for any water leaks.
5. Purge air from the gas line. Insufficient purging may keep the heater from lighting on the first try.
6. Double check gas connections, make sure no leaks are present. Use soapy water to inspect.
7. Double check incoming electrical power, verify sufficient output voltage to the heater.
8. The unit comes wired for 240VAC power. If the supply voltage is nominally 120V, switch blower harness located inside the cabinet (see wiring diagram).
9. If installed indoors, make sure flue gases are vented properly, and that combustion and makeup air openings are adequate.
10. Locate and turn the gas valve ON.
11. Locate the plugged bleedle valve off the right side of the gas valve.
12. Remove the bleedle plug and connect a manometer to the valve.
13. Locate and flip the display lid upwards.
14. Turn the heater on, by pressing the ON/OFF toggle switch on the front display.
15. Set the mode to either SPA or POOL.
16. If the set point is higher than the current temperature, the heater will begin its startup sequence.
17. The ignition control will verify that the blower air switch is open before starting the blower. Once proven open, the blower will be powered to start the ignition sequence. Verify suction pressure matches the table below, Blower Suction Pressure, for your model heater during the pre-purge period.
18. Once the blower air switch proves, a 45 second pre-purge period will begin to purge residual gases from the combustion chamber.

Model	Elevation	Blower Suction
259	0-2000 ft.	-3.5 to -3.8 "WC
	2000-5000 ft.	-3.1 to -3.6 "WC
	5000-7000 ft.	-2.8 to -3.2 "WC
409	0-2000 ft.	-3.7 to -4.0 "WC
	2000-5000 ft.	-3.3 to -3.8 "WC
	5000-7000 ft.	-3.0 to -3.4 "WC

Blower Suction Pressure

19. Once the pre-purge period ends, the igniter will begin to spark just prior to the gas valve opening. The gas valve will open for a 4 second trial for ignition. If flame is proven, the heater will operate to meet heat demand. If flame is not proven, the heater will enter a post-purge period and then retry the ignition cycle or lockout, depending on the heater configuration.
20. Once gas is flowing, the manometer reading will drop to -0.40" +/- .1" WC.
21. Visually check through the sight glass that the heater is on and heating. A yellowish glow coming from the refractory indicates that the heater is running. The flame should be a blueish color.
22. Remove the manometer and replace with bleedle plug.
23. Reinstall front door panel and knurled screw holding the door in place.
24. Feel the inlet and outlet pipes. Outlet pipe should be only slightly warmer than the inlet. It should not be hot.

SECTION 2 - CAUTION

Elevated water temperature can be hazardous. The U.S. Consumer Product Safety Commission has these guidelines:

1. Spa water temperatures should never exceed 104°F (40°C). A temperature of 100°F (38°C) is considered safe for a healthy adult. Special caution is suggested for young children.

2. Drinking of alcoholic beverages before or during spa or hot tub use can cause drowsiness which could lead to unconsciousness and subsequently result in drowning.

3. *Pregnant Women Beware!* Soaking in water over 102°F (39°C) can cause fetal damage during the first three months of pregnancy resulting in the birth of a brain-damaged or deformed child. Pregnant women should stick to the 100°F (38°C) maximum rule.

4. Before entering the spa or hot tub, users should check the water temperature with an accurate thermometer; spa or hot tub thermostats may err in regulating water temperatures by as much as 4°F (2.2°C).

5. Persons with a medical history of heart disease, circulatory problems, diabetes, or blood pressure problems should obtain a physician's advice before using pools or hot tubs.

6. Persons taking medications which induce drowsiness, such as tranquilizers, antihistamines, or anticoagulants, should not use spas or hot tubs.

SECTION 3 - MAINTENANCE AND CARE PROCEDURES

WARNING: *Check the heater for possible rodent nests after long periods of non-use.*

To be followed one month after start-up and then semi-annually.

1. Inspect and operate all controls, gas valve and pressure relief valve.

2. On indoor heaters, clean room intake openings to ensure adequate flow of combustion and ventilation air.

CAUTION: *Combustion air must not be contaminated by corrosive chemical fumes which can damage the heater and void the warranty.*

3. Keep area around heater clear and free from combustible materials, gasoline and other flammable and corrosive vapors and liquids.

IF HEATER WILL NOT FIRE:

If you have no electrical power, it may be that your "circuit breaker" has tripped. Try re-setting it.

If you have electrical power but the heater will not fire check the following or see Troubleshooting section:

1. The time clock must be in the "ON" position.

2. Your pump strainer basket may be full. If so remove debris.

3. Your filter may be dirty. If so, backwash or clean filter. (To tell if your filter is dirty, look to see if the filter pressure will be higher than usual).

4. The pump may have lost its prime and be running dry. Check the pressure on the filter. If there is no pressure; then you are not moving water (or your gauge is broken). Try to get the pump to run at its normal flow rate.

WARNING: *Should overheating occur or the gas supply fail to shut off, turn off the manual gas control to the heater.*

CAUTION: *Propane gas is heavier than air and will settle on the ground. Since propane can accumulate in confined areas, extra care should be exercised when lighting propane heaters.*

FOR YOUR SAFETY READ BEFORE OPERATING
POUR VOTRE SÉCURITÉ LISEZ AVANT DE METTRE EN MARCHE

WARNING: If you do not follow these instructions exactly, a fire or explosion may result causing property damage, personal injury or loss of life.
AVERTISSEMENT: Quiconque ne respecte pas a la lettre les instructions dans la présente notice risque de déclencher un incedie ou une explosion entraînant des dommages, des blessures ou la mort.

A. This appliance does not have a pilot. It is equipped with an ignition device which automatically lights the burner. Do not try to light the burner by hand.

B. BEFORE OPERATING smell all around the appliance area for gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.
WHAT TO DO IF YOU SMELL GAS
* Do not try to light any appliance.
* Do not touch any electric switch; do not use any phone in your building.
* Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
* If you cannot reach your gas supplier, call the fire department.

C. Use only your hand to turn the gas control ON or OFF. Never use tools. If you cannot change the ON/OFF setting by hand, do not try to repair it, call a qualified service technician. Force or attempted repair may result in a fire or explosion.

D. Do not use this appliance if any part has been under water. Immediately call a qualified service to inspect the appliance and to replace any part of the control system and any gas control which has been under water.

A. Cet appareil ne comporte pas de veilleuse. Il est muni d'un dispositif d'allumage qui allume automatiquement le brûleur. Ne tentez pas d'allumer le brûleur manuellement.

B. AVANT DE FAIRE FONCTIONNER, reniflez tout autour de l'appareil pour deceler une odeur de gaz. Reniflez prés du plancher, car certains gaz sont plus lourds que l'air et peuvent s'accumuler au niveau du sol.
QUE FAIRE SI VOUS SENTEZ UNE ODEUR DE GAZ:
* Ne pas tenter d'allumer d'appareil.
* Ne touchez à aucun interrupteur; ne pas vous servir des téléphones se trouvant dans le bâtiment.
* Appelez immédiatement votre fournisseur de gaz depuis un voisin. Suivez les instructions du fournisseur.
* Si vous ne pouvez rejoindre le fournisseur, appelez le service des incendies.

C. Utilisez seulement votre main pour tourner le contrôle du gaz "Marche" (ON) ou "D'Arret" (OFF). N'utilisez jamais d'outils. Si vous ne pouvez pas changer le réglage "Marche / D'Arret" (ON / OFF) à la main, ne pas essayer de le réparer, appelez un technicien qualifié.

D. N'utilisez pas cet appareil s'il a été plongé dans l'eau même partiellement. Faites inspecter l'appareil par un technicien qualifié et remplacez toute partie du systéme de contrôle et toute commande qui ont été plongés dans l'eau.

OPERATING INSTRUCTIONS
INSTRUCTIONS DE MISE EN MARCHE

1. **STOP!** Read the safety information above on this label.
2. Set the thermostat to the lowest setting.
3. Turn off all electric power to the appliance.
4. This appliance does not have a pilot. It is equipped with an ignition device which automatically lights the burner. Do not try to light the burner by hand.
5. Remove heater door panel.
6. Pull toggle style switch away from you to turn gas "OFF".
7. Wait five (5) minutes to clear out any gas. Then smell for gas, including near the floor. If you smell gas STOP! Follow "B" in the safety information above on this label. If you don't smell gas, go to the next step.



GAS CONTROL SWITCH SHOWN IN "OFF" POSITION
BOUTON DE COMMANDE DE GAZ MONTRE DANE LA POSITION *D'ARRET*(OFF)

8. Push the toggle switch towards you to turn the gas "ON".
9. Replace heater door panel.
10. Turn on all electric power to the appliance.
11. Set thermostat to desired setting.
12. If the appliance will not operate, follow the instructions "To Turn Off Gas To Appliance" and call your service technician or gas supplier.

1. **ARRÊTEZ!** Lisez les instructions de sécurité sur la portion superieure de cette étiquette.
2. Réglez le thermostat à la température la plus basse.
3. Coupez l'alimentation électrique de l'appareil.
4. Cet appareil ne comporte pas de veilleuse. Il est muni d'un dispositif d'allumage qui allume automatiquement le bruleur. Ne tentez pas d'allumer le bruleur manuellement.
5. Enievez le panneau de porte du réchauffeur.
6. Interrupteur à tirette de style bascule loin de vous à tourner à gaz "D'Arret" (OFF).
7. Attendre cinq (5) minutes pour laisser échapper tout le gaz. Reniflez tout autour de l'appareil, y compris prés du plancher, pour déceler une odeur de gaz. Si vous sentez une odeur de gaz, ARRÊTEZ! Passez à l'étape "B" des instructions de sécurité sur la portion supérieure de cette étiquette. S'il n'y a pas d'odeur de gaz, passez à l'étape suivante.
8. Poussez l'interrupteur à bascule vers vous pour transformer le gaz "Marche" (ON).
9. Reposez le panneau de porte du réchauffeur.
10. Mettez l'appareil sous tension.
11. Réglez le thermostat à la température désirée.
12. Si l'appareil ne se met pas en marche, suivez les instructions intitulées "Comment couper l'admission de gaz de l'appareil" et appelez un technicien qualifié ou le fournisseur de gaz.

TO TURN OFF GAS TO APPLIANCE
COMMENT COUPER L'ADMISSION DE GAZ L'APPAREIL

1. Set the thermostat to the lowest setting.
2. Turn off all electrical power to the appliance if service is to be performed.
3. Remove heater door panel.
4. Pull toggle style switch away from you to turn gas "OFF".
5. Replace heater door panel.

1. Réglez le thermostat à la température la plus basse.
2. Coupez l'alimentation électrique de l'appareil s'il faut procéder à l'entretien.
3. Enievez le panneau de porte du réchauffeur.
4. Interrupteur à tirette de style bascule loin de vous à tourner à gaz "D'Arret" (OFF).
5. Reposez le panneau de porte du réchauffeur.

P/N 902025 REV 1

POOL & SPA WATER CHEMISTRY

Chemical imbalance can cause severe damage to your heater and associated equipment. Maintain your water chemistry according to the chart on page 2. If the mineral content and dissolved solids in the water become too high, scale forms inside the heat exchanger tube, reducing heater efficiency and damaging the heater. If the pH drops below 7.2, this will cause corrosion of the heat exchanger and severely damage the heater. **Heat exchanger damage resulting from chemical imbalance is not covered by the warranty.**

AUTOMATIC CHLORINATORS AND CHEMICAL FEEDERS

All chemicals must be introduced and completely diluted into the pool or spa water before being circulated through the heater. Do not place sanitizing chemicals in the skimmer. High chemical concentrations will result when the pump is not running (e.g. overnight).

Chlorinators must feed downstream of the heater and have an anti-siphoning device to prevent chemical back-up into the heater when the pump is shut off. A check valve should be installed between the heater outlet and the chlorinator.

See plumbing diagrams on page 30 and 31.

NOTE: *High chemical concentrates from feeders and chlorinators that are out of adjustment will cause rapid corrosion to the heat exchanger.* ***Such damage is not covered under the warranty.***

COLD WEATHER OPERATION

IMPORTANT FREEZE INFORMATION

MODERATE CLIMATE: Heater operation can continue during short-term cold spells. When temperatures are between 0°F and 32°F, flow (continuous pump operation) must be maintained.

CAUTION: *Do not use the heater to maintain water temperatures just above freezing or for freeze protection. When heater is used during freezing weather, care must be taken to avoid freeze-ups. Continuous pump operation is a must. Additional protection may be required. The heater is not warranted against freeze-ups.*

COLD CLIMATE: Prolonged operation with water temperatures below 50°F is not recommended. When starting the heater with water temperatures below 50°F, operate the heater continuously until higher temperatures are reached. Operating the heater for prolonged periods with pool water below 50°F can seriously damage the heater, and is not covered by the warranty.

For cold climate areas, please follow the winterizing procedures listed.

WINTERIZING THE POOL & SPA HEATER

Heaters installed outdoors in freezing climate areas may be shut down for the winter. Observe the following procedure for winterizing the heater:

1. Turn off gas valve, manual gas valve, and electrical supply to the heater.

2. Open the drain valve located on the inlet/outlet header (at the lowest point). Pull the PRV handle upwards to allow air in while the water drains through the valve.

PART TWO
INSTALLATION AND SERVICE INSTRUCTIONS

SECTION 1 - RECEIVING EQUIPMENT

The manufacturer recommends that this manual be reviewed thoroughly before installing your pool/spa heater. If there are any questions that this manual does not answer, please contact the factory or your local representative.

On receipt of your equipment it is suggested that you visually check for external damage to the carton. If the carton is damaged, a note should be made on the Bill of Lading when signing for the equipment. Remove the heater from the carton. If it is damaged, report the damage to the carrier immediately. Save the carton.

These items are shipped inside a box in the carton with the heater:

STANDARD UNIT

1. Plastic pipe finish flange for gas line
2. Bonding lug with mounting screw
3. 2” CPVC Slip x Slip 8-3/16” Nipple
4. 2” CPVC Slip x Slip 7” Nipple
5. (2) 2” CPVC/PVC unions with "O" rings
6. (2) 2” CPVC Ring Nuts
7. (2) “O” rings
8. (2) 2” CPVC tail pieces
9. (2) 3-1/2” Vinyl Grommets

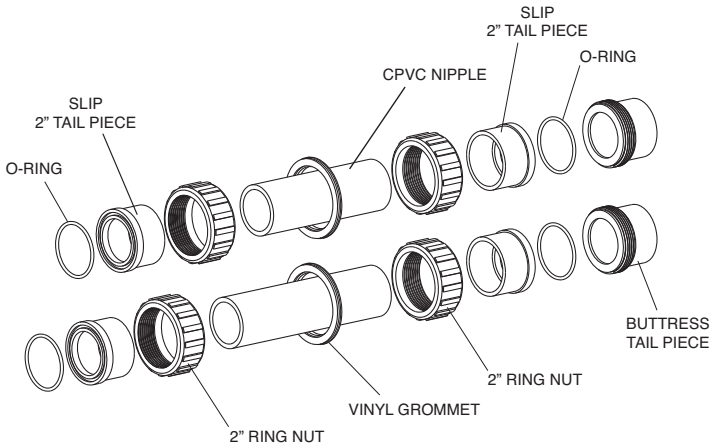

Be sure that you receive the number of packages indicated on the Bill of Lading.

When ordering parts, you must specify the model and serial numbers of the heater. See below for location of serial number. When ordering under warranty conditions, you must also specify date of installation.

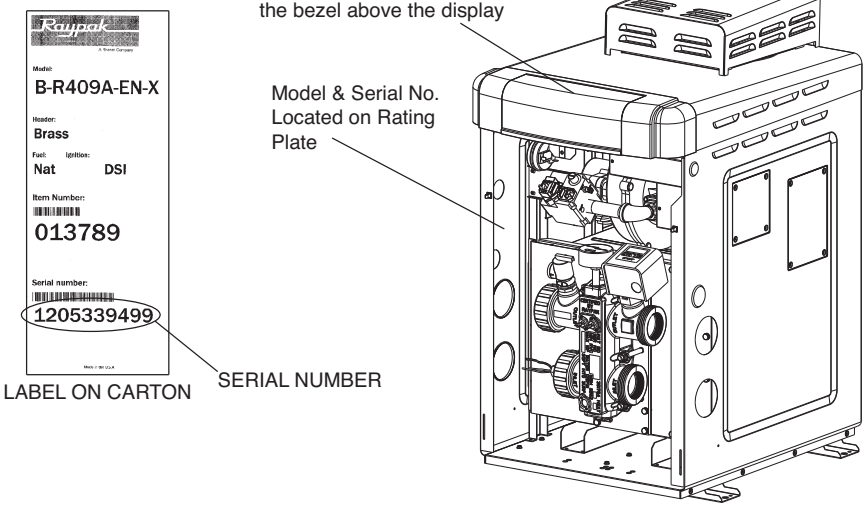

SECTION 2 - GENERAL SPECIFICATIONS

These heaters are design-certified and tested under the latest requirements of the ANSI Z21.56 / CSA 4.7 Standard for Gas-Fired Pool Heaters. All heaters can be used either indoor or outdoors.

Ambient Temperature Rating of Heater Components

Electronic Ignition Heater*	-32°F to + 175°F

*Requires 120 or 240VAC Power Supply

Rated inputs are suitable for up to 2,000 feet elevation. The input will be reduced by approximately 4% for each 1,000 feet above 2,000 feet, as high elevation reduces combustion performance.

SECTION 3 - INSTALLATION INSTRUCTIONS

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

WARNING: This unit contains refractory ceramic fiber (RCF) insulation in the combustion chamber. RCF, as manufactured, does not contain respirable crystalline silica. However, following sustained exposure to very high temperatures (>2192°F), the RCF can transform into crystalline silica (cristabolite). The International Agency for Research on Cancer (IARC) has classified the inhalation of crystalline silica (cristabolite) as carcinogenic to humans.

When removing the burner or heat exchanger, take precautions to avoid creating airborne dust and avoid inhaling airborne fibers. When cleaning spills, use wet sweeping or High Efficiency Particulate Air (HEPA) filtered vacuum to minimize airborne dust. Use feasible engineering controls such as local exhaust ventilation or dust collecting systems to minimize airborne dust. Wear appropriate personal protective equipment including gloves, safety glasses with side shields, and appropriate NIOSH certified respiratory protection, to avoid inhalation of airborne dust and airborne fiber particles.

IMPORTANT NOTICE

These instructions are intended only for the use by qualified personnel, specifically trained and experienced in the installation of this type of heating equipment and related system components. Installation and service personnel may be required by some states to be licensed. If your state is such, be sure your contractor bears the appropriate license. Persons not qualified shall not attempt to fix this equipment nor attempt repairs according to these instructions.

WARNING: *Improper installation, adjustment, alteration, service or maintenance may damage the equipment, create a hazard resulting in asphyxiation, explosion or fire, and will void the warranty.*

CODE REQUIREMENTS

NOTE: *The heater should not be located in an area where possible water leakage will result in damage to the area adjacent to the heater or to the structure. When such locations cannot be avoided, it is recommended that a suitable drain pan, with adequate drainage, be installed under the heater. The pan must not restrict combustion air flow.*

Installation must be in accordance with local codes, or, in the absence of local codes, with the latest edition of the National Fuel Gas Code, ANSI Z223.1/NFPA54 and National Electrical Code, ANSI/NFPA 70, and for Canada, the latest edition of CAN/CSA-B149 Installation Codes, and Canadian Electrical Code, CSA C22.1 Part 1 and Part 2.

CLEARANCES

ALL HEATERS
For clearances from combustible surfaces, see the chart below.

CLEARANCE FROM COMBUSTIBLE CONSTRUCTION	
INDOOR INSTALLATIONS:	
Top* - 30”	Back - 1”
Front - Alcove (Open)	Right Side - 1”
Vent - 1”	Left Side - 1”
Floor** - 0”	
OUTDOOR INSTALLATION - TOP EXHAUST	
Top* - Unobstructed *(Outdoor Stack)*	
Floor - 0”	Right Side - 8”
Back - 6”	Left Side - 8”
OUTDOOR INSTALLATION - REAR EXHAUST	
Top* - Unobstructed	
Floor - 0”	Right Side - 8”
Back - 12”	Left Side - 8”

*Clearance from top of vent terminal.
**Do not install on carpeting.

When installed according to the listed minimum clearances from combustible construction, the pool heater can still be serviced without removing permanent construction around the heater.

However, **for ease of servicing, Raypak recommends a clearance of at least 24” in the front and at least 18" on the water connection side**. This will enable the heater to be serviced in its installed location, that is, without movement or removal of the heater.

The heater must be installed in a manner that will enable the heater to be serviced without removing any structure around the heater.

FLOORING: This heater can be installed on combustible flooring.

OUTDOOR HEATER INSTALLATION

These heaters are design-certified for outdoor installation, when equipped with the approved tops designated for outdoor use.

WARNING: The heater shall not be located in an area where water sprinklers, or other devices, may cause water to spray through the cabinet louvers and into the heater. This could cause internal rusting or damage electrical components, and void the warranty.

WARNING: Do not install within 3 feet of a heat pump or an outdoor condensing unit. Strong air intake from this type of equipment can disturb the combustion process and cause damage or personal injury.

Heaters must not be installed under an overhang of less than three 3 ft from the top of the heater. Three sides must be open in the area under the overhang. Roof water drainage must be diverted away from the heaters installed under overhangs with the use of gutters.

For U.S. installations, the point from where the flue products exit the heater must be a minimum of 4 ft below, 4 ft horizontally from, or 1 ft above any door, window or gravity inlet into any building. The top surface of the heater shall be at least 3 ft above any forced air inlet, or intake ducts located within 10 ft horizontally.

For installations in Canada, pool heaters shall not be installed with the top of the vent assembly within 10 ft below, or to either side, of any opening into the building. Refer to the latest revisions of CAN/CSA-B149.

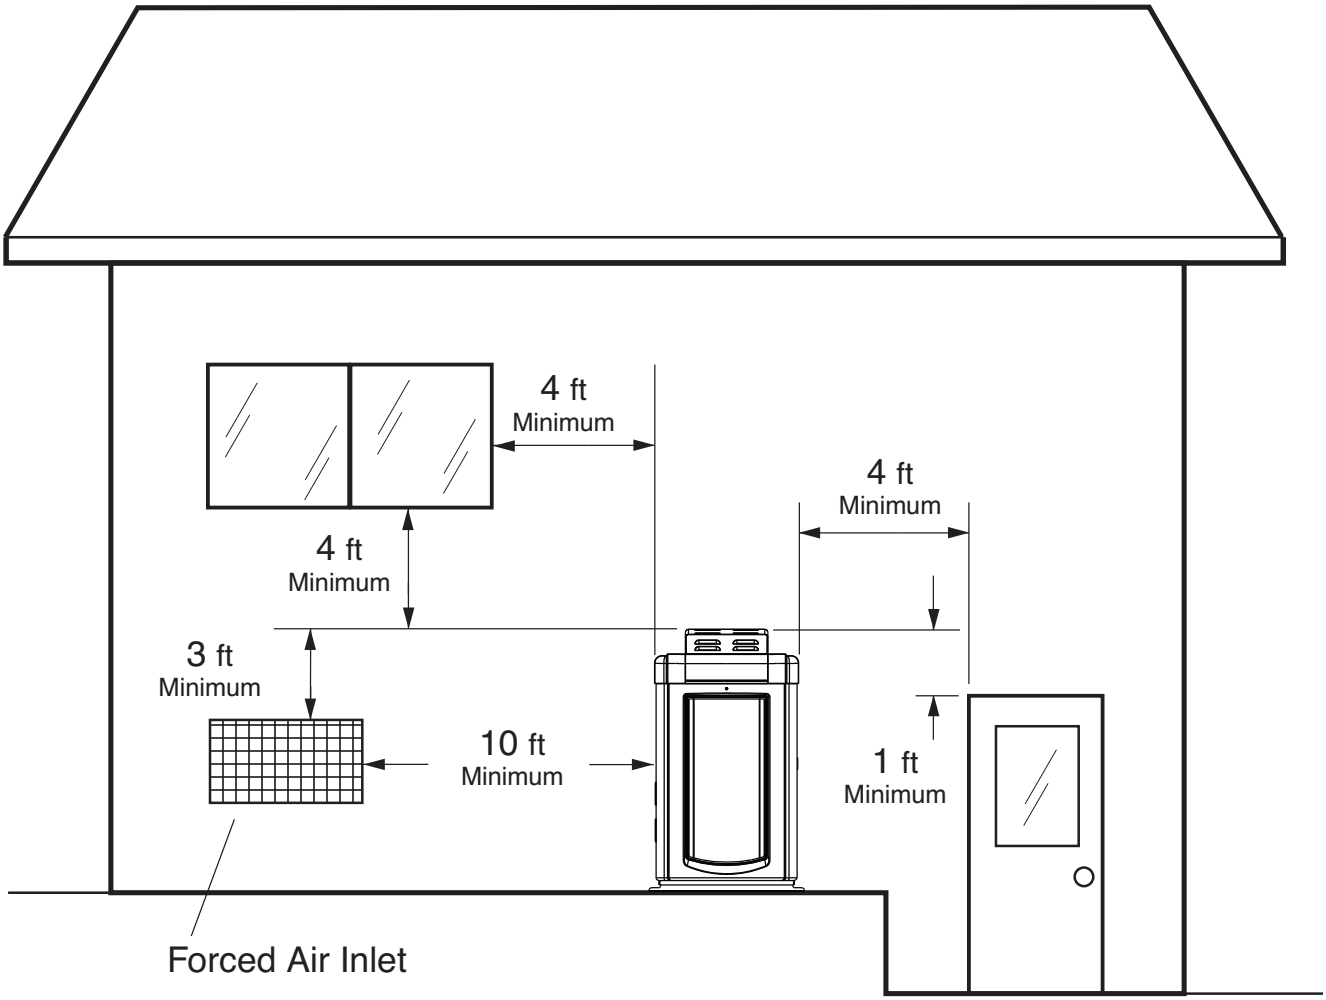

For installations in Florida and Texas, that must comply with the Florida or Texas Building Code, follow the directions on page 13 for the installation of hurricane tie-down method for all models.

FLORIDA BUILDING CODE 2010
TIE-DOWN METHOD

ULTIMATE WIND SPEED = 170 MPH, 3 SECOND GUST
NOMINAL WIND SPEED = 132 MPH, 3 SECOND GUST (ASD)
EXPOSURE = D

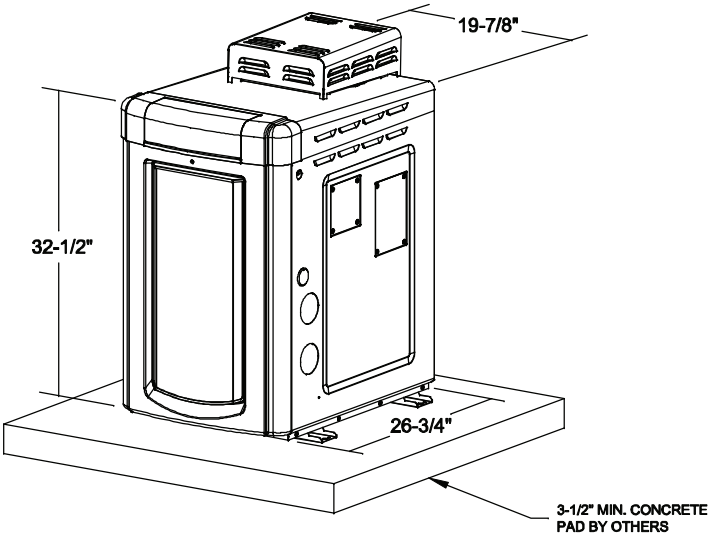

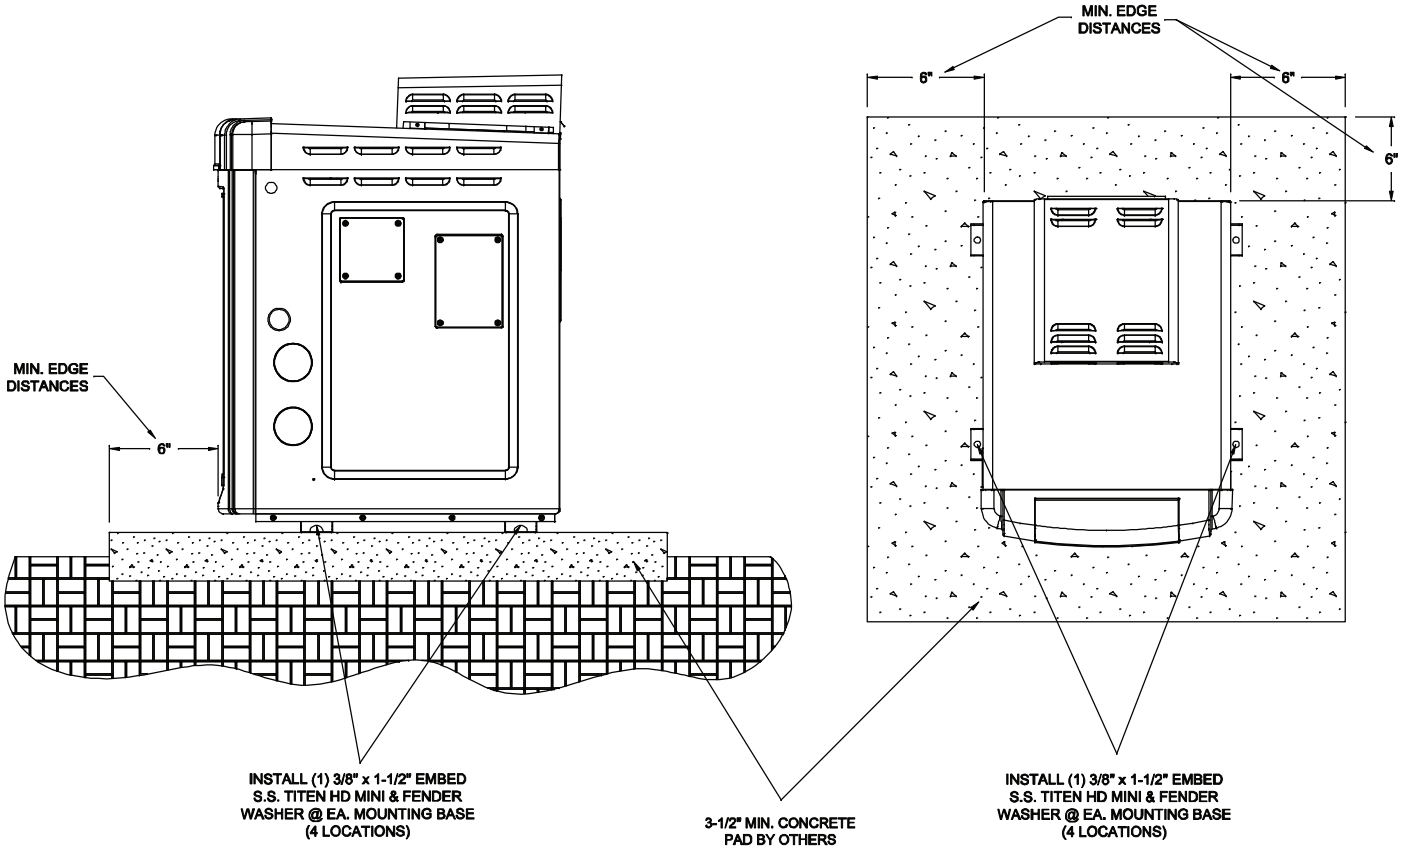

INDOOR HEATER INSTALLATION

For Canada, indoor installation is restricted to an enclosure that is not occupied and does not directly communicate with an occupied area. Refer to the latest edition of CAN/CSA-B149 for specific requirements. Locate heater as close as is practical to a chimney or gas vent. **The heater must always be vented to the outside.** See the Venting section (beginning on page 17) for details. Minimum allowable space is shown on the nameplate.

SPECIFICATIONS AND DIMENSIONS

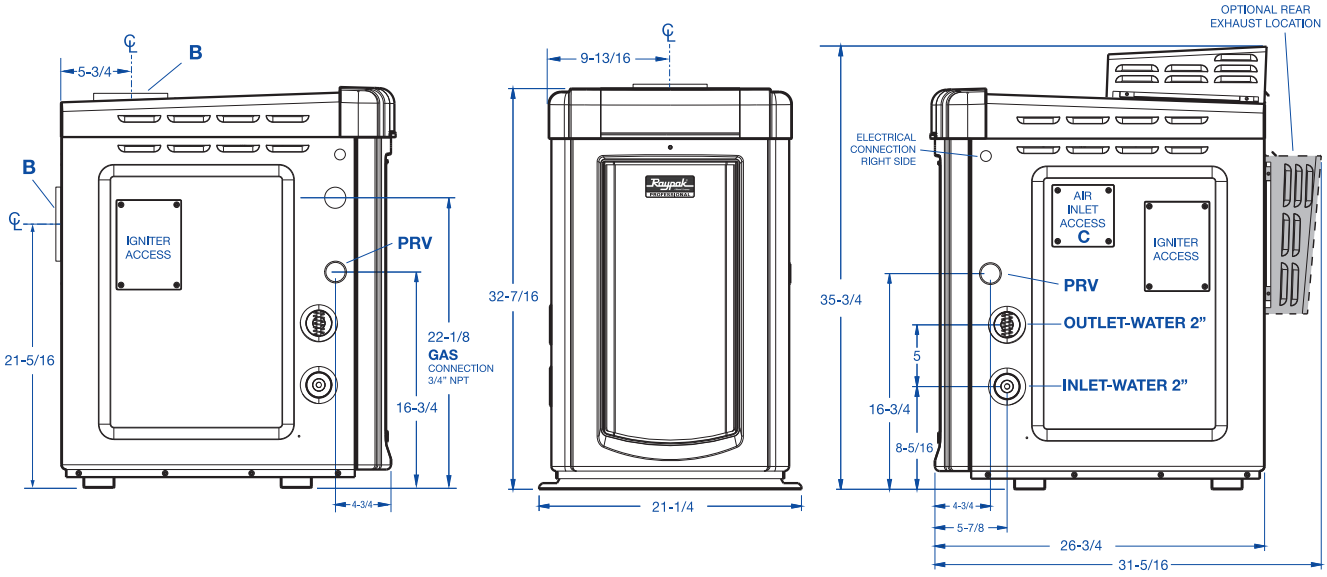

Heater Model	MBTU Input	Dimensions (in.)				Shipping Weight (lbs) w/ Stackless Top
		Flue Diameter (B)	Air Inlet (C)	Minimum Flow (gpm)	Maximum Flow (gpm)	
BR-259	250.0	6"	4"	25	125	193
BR-409	399.0	6"	4"	40	125	205

Notes:

1. The model number prefix indicates: (B=Bronze header), (R=Raypak) Model number suffix indicates: pilot type (E = digital) and fuel type (P = propane, N = natural gas) fin tubing (X=Cupro-Nickel, C= Copper). Example: Model number BR-409-EN-X indicates a unit with digital (IID) ignition using natural gas with bronze headers and cupro-nickel tubes.

2. Ratings are for natural gas and elevations up to 2,000 feet above sea level. For elevations over 2,000 feet, consult the factory.

3. Flue gases must be properly vented with CAT I vertical venting or CAT III horizontal venting. Non-metallic venting not acceptable. Inlet air can be ducted with 4" metal or PVC pipe. See the venting section of this manual for complete venting details.

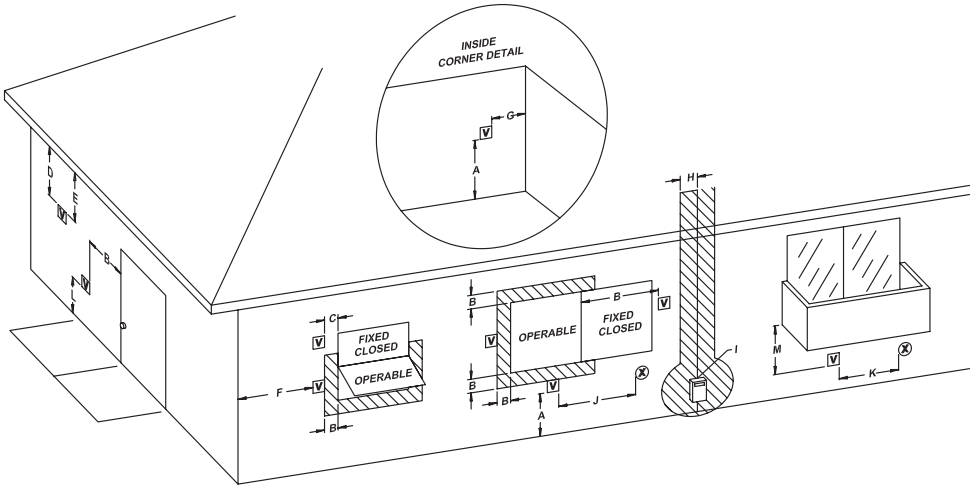

Minimum Clearances from Vent/Air Inlet Terminations – Indoor and Outdoor Installations

		U.S. Installations[1]	Canadian Installations[2]
A	Clearance above grade, veranda, porch, deck, or balcony	1 ft (30 cm)	1 ft (30 cm)
B	Clearance to window or door that may be opened	4 ft (1.2m) below or to side of opening; 1 foot (30 cm) above opening	3 ft (91 cm)
C	Clearance to permanently closed window	*	*
D	Vertical clearance to ventilated soffit located above the terminal within a horizontal distance of 2 ft (61cm) from the centerline of the terminal	5 ft (1.5m)	*
E	Clearance to unventilated soffit	*	*
F	Clearance to outside corner	*	*
G	Clearance to inside corner	6 ft (1.83m)	*
H	Clearance to each side of center line extended above meter/regulator assembly	*	3 ft (91 cm) within a height 15 ft above the meter/regulator assembly
I	Clearance to service regulator vent outlet	*	3 ft (91cm)
J	Clearance to non-mechanical air supply inlet to building or the combustion air inlet to any other appliance	4 ft (1.2m) below or to side of opening; 1 ft (30 cm) above opening	3 ft (91 cm)
K	Clearance to mechanical air supply inlet	3 ft (91 cm) above if within 10 ft (3m) horizontally	6 ft (1.83m)
L	Clearance above paved sidewalk or paved driveway located on public property	7 ft (2.13m)	7 ft (2.13m) **t**
M	Clearance under veranda, porch, deck or balcony	*	12 in. (30 cm) **TT**

1 In accordance with the current ANSI Z223.1/NFPA 54 National Fuel Gas Code
2 In accordance with the current CAN/CSA-B149 Installation Codes
t Vent terminal shall not terminate directly above sidewalk or paved driveway located between 2 single family dwellings that serves both dwellings
TT Permitted only if veranda, porch, deck, or balcony is fully open on a minimum of two sides beneath the floor and top of terminal and underside of veranda, porch, deck or balcony is greater than 1 ft (30cm)
* Clearances in accordance with local installation codes and the requirements of the gas supplier

Vent/Air Inlet Termination Clearances

COMBUSTION AND VENTILATION AIR (Indoor Units Only)

The heater must have both combustion and ventilation air. Minimum requirements for net free air supply openings are one opening that is 12 inches from the ceiling for ventilation, and one opening that is 12 inches from the floor for combustion air as outlined in the latest edition of the National Fuel Gas Code, ANSI Z223.1(Canada-CAN/CSA-B149) and any local codes that may have jurisdiction.

A. All Air From Inside The Building:
Each opening shall have a minimum net free area as noted:

Model	Square Inches
259	250
400	399

B. All Air From Outdoors:
When air is supplied directly from outside the building, each opening shall have a minimum net free area as noted:

Model	Unrestricted Opening (sq. in.)	Typical Screened *or* Louvered Opening (sq. in.)	Typical Screened *and* Louvered Opening (sq. in.)
259	63	95	126
409	100	150	200
CAUTION: Combustion air must not be contaminated by corrosive chemical fumes which can damage the heater and void the warranty.			

Direct Vent

If outside air is drawn through the intake pipe directly to the unit for combustion:

1. Install combustion air direct vent in accordance on page 21 (horizontal) or page 22 (vertical) of this manual.

2. Provide adequate ventilation of the space occupied by the heater(s) by an opening(s) for ventilation air at the highest practical point communicating with the outdoors.

   a) In the US, the total cross-sectional area shall be at least 1 $in.^2$ of free area per 20,000 BTUH (111 mm^2 per kW) of total input rating of all equipment in the room when the opening is communicating directly with the outdoors or through vertical duct(s). The total cross-sectional area shall be at least 1 $in.^2$ of free area per 10,000 BTUH (222 mm^2 per kW) of total input rating of all equipment in the room when the opening is communicating with the outdoors through horizontal duct(s).

   b) In Canada, there shall be permanent air supply opening(s) having a total cross-sectional area of not less than 1 $in.^2$ of free area per 30,000 BTUH (70 mm^2 per kW) of the total rated input. The location of the opening(s) shall not interfere with the intended purpose of the opening(s) for the ventilation air.

3. In cold climates, and to mitigate potential freeze-up, Raypak highly recommends the installation of a motorized sealed damper to prevent the circulation of cold air through the heater during the non-operating hours.

CAUTION: Proper installation of flue venting is critical for the safe and efficient operation of the heater.

General

Appliance Categories

Heaters are divided into four categories based on the pressure produced in the exhaust and the likelihood of condensate production in the vent.

Category I – A heater which operates with a non-positive vent static pressure and with a vent gas temperature that avoids excessive condensate production in the vent.

Category II – A heater which operates with a non-positive vent static pressure and with a vent gas temperature that may cause excessive condensate production in the vent.

Category III – A heater which operates with a positive vent pressure and with a vent gas temperature that avoids excessive condensate production in the vent.

Category IV – A heater which operates with a positive vent pressure and with a vent gas temperature that may cause excessive condensate production in the vent.

See the table below for appliance category requirements.

NOTE: For additional information on appliance categorization, see appropriate ANSI Z21 Standard and the NFGC (U.S.), or B149 (Canada), or applicable provisions of local building codes.

WARNING: Contact the manufacturer of the vent material if there is any question about the appliance categorization and suitability of a vent material for application on a Category III or IV vent system. Using improper venting materials can result in personal injury, death or property damage.

Combustion Air Supply	Exhaust Configuration	Heater Venting Category	Certified Materials	Combustion Air Inlet Material
From Inside Building (Non-Direct Venting)	Vertical Venting	I	B-Vent Equivalent	
	Horizontal Through-the-Wall Venting	III	UL 1738 Metallic Vent (such as AL29-4C)	
From Outside Building (Direct Venting)	Vertical Venting	III	UL 1738 Metallic Vent	Galvanized Steel PVC ABS CPVC
	Horizontal Through-the-Wall Venting	III	UL 1738 Metallic Vent (such as AL29-4C)	

Venting Category Requirements

Support of Vent Stack

The weight of the vent stack or chimney must not rest on the heater vent connection. Support must be provided in compliance with applicable codes. The vent should also be installed to maintain proper clearances from combustible materials. Use insulated vent pipe spacers where the vent passes through combustible roofs and walls.

Vent Terminal Location

NOTE: During winter months check the vent cap and make sure no blockage occurs from build-up of snow or ice.

1. Condensate can freeze on the vent cap. Frozen condensate on the vent cap can result in a blocked flue condition.

2. Give special attention to the location of the vent termination to avoid possibility of property damage or personal injury.

3. Gases may form a white vapor plume in winter. The plume could obstruct a window view if the termination is installed near windows.

4. Prevailing winds, in combination with below-freezing temperatures, can cause freezing of condensate and water/ice build-up on buildings, plants or roofs.

5. The bottom of the vent terminal and the air intake shall be located at least 12 in. above grade, including normal snow line.

6. Un-insulated single-wall metal vent pipe shall not be used outdoors in cold climates for venting gas-fired equipment.

7. Through-the-wall vents for Category II and IV appliances and non-categorized condensing appliances shall not terminate over public walkways or over an area where condensate or vapor could create a nuisance or hazard or could be detrimental to the operation of regulators, relief valves, or other equipment. Where local experience indicates that condensate is a problem with Category I and III appliances, this provision shall also apply.

8. Locate and guard vent termination to prevent accidental contact by people or pets.

9. DO NOT terminate vent in window well, stairwell, alcove, courtyard or other recessed area.

10. DO NOT terminate above any door, window, or gravity air intake. Condensate can freeze, causing ice formations.

11. Locate or guard vent to prevent condensate from damaging exterior finishes. Use a rust-resistant sheet metal backing plate against brick or masonry surfaces.

12. DO NOT extend exposed vent pipe outside of building beyond the minimum distance required for the vent termination. Condensate could freeze and block the vent pipe.

U.S. Installations

Refer to the latest edition of the National Fuel Gas Code.

Vent termination requirements are as follows:

1. Vent must terminate at least 4 ft below, 4 ft horizontally from or 1 ft above any door, window or gravity air inlet to the building.

2. The vent must not be less than 7 ft above grade when located adjacent to public walkways.

3. Terminate vent at least 3 ft above any forced air inlet located within 10 ft.

4. Vent must terminate at least 4 ft horizontally, and in no case above or below unless 4 ft horizontal distance is maintained, from electric meters, gas meters, regulators, and relief equipment.

5. Terminate vent at least 6 ft away from adjacent walls.

6. DO NOT terminate vent closer than 5 ft below roof overhang.

7. The vent terminal requires a 12 in. vent terminal clearance from the wall.

8. Terminate vent at least 1 ft above grade, including normal snow line.

9. Multiple direct vent installations require a 4 ft clearance between the ends of vent caps located on the same horizontal plane.

WARNING: The Commonwealth of Massachusetts requires that sidewall vented heaters, installed in every dwelling, building or structure used in whole or in part for residential purposes, be installed using special provisions as outlined on page 47 of this manual.

Canadian Installations

Refer to latest edition of the B149 Installation code.

A vent shall not terminate:

1. Directly above a paved sidewalk or driveway which is located between two single-family dwellings and serves both dwellings.

2. Less than 7 ft (2.13 m) above a paved sidewalk or paved driveway located on public property.

3. Within 6 ft (1.8 m) of a mechanical air supply inlet to any building.

4. Above a meter/regulator assembly within 3 ft (915 mm) horizontally of the vertical centre-line of the regulator.

5. Within 3 ft (0.9 m) of any gas service regulator vent outlet.

6. Less than 1 ft (305 mm) above grade level.

7. Within the 3 ft (915 mm) of a window or door which can be opened in any building, any non-mechanical air supply inlet to any building or the combustion air inlet of any other appliance.

8. Underneath a verandah, porch or deck, unless the verandah, porch or deck is fully open on a minimum of two sides beneath the floor, and the distance between the top of the vent termination and the underside of the verandah, porch or deck is greater than 1 ft (305 mm).

Venting Installation Tips

Support piping:

- horizontal runs—at least every 5 ft
- vertical runs—use braces
- under or near elbows

WARNING: Examine the venting system at least once a year. Check all joints and vent pipe connections for tightness, corrosion or deterioration.

Venting Configurations

For heaters connected to gas vents or chimneys, vent installations shall be in accordance with the NFGC (U.S.), or B149 (Canada), or applicable provisions of local building codes.

Natural Draft Vertical Venting (Category I) Fan-Assisted

Installation

Natural draft venting uses the natural tendency of the heated flue gases to rise, until they are expelled from the top of the flue. The negative draft must be within the range of -.01 to -.08 in. WC as measured 12 in. above the appliance flue outlet to ensure proper operation. Vent material must be listed by a nationally recognized test agency.

Double-wall Type B vent must be used to promote draft and to minimize condensation in the vent.

No drafthood is required or offered. A single acting barometric damper is recommended if the height exceeds 25 feet. Consult the factory for additional information.

Model No.	Certified Vent Material	Vent Size (in.)	Vertical Vent Height[1] (ft)		Combustion Air Intake Pipe Material**	Air Inlet Max. Length* (ft) 4" Ø
			Min.	Max.		
259	Category I (Type B Equivalent)	6	5	25	Galvanized Steel, PVC, ABS, CPVC	80
409						

[1] Vent lengths are based on a lateral length of 2 ft. Refer to the latest edition of the NFGC for further details. When vertical height exceeds 25 ft, consult factory prior to installation.

* Subtract 10 ft per elbow. Max. 4 elbows.

** Schedule 40 in PVC or CPVC

Category I Vertical Venting

The connection from the appliance vent to the stack must be as direct as possible. The horizontal breaching of a vent must have an upward slope of not less than 1/4 inch per linear foot from the heater to the vent terminal. The horizontal portions of the vent shall also be supported for the design and weight of the material employed to maintain clearances and to prevent physical damage or separation of joints.

Termination

The vent terminal should be vertical and should terminate outside the building at least 2 ft above the highest point of the roof that is within 10 ft. The vent cap should have a minimum clearance of 4 ft horizontally from and in no case above or below (unless a 4 ft horizontal distance is maintained) electric meters, gas meters, regulators and relief equipment. The distance of the vent terminal from adjacent public walkways, adjacent buildings, open windows and building openings must be consistent with the NFGC (U.S.) or B149 (Canada). Gas vents supported only by flashing and extended above the roof more than 5 ft should be securely guyed or braced to withstand snow and wind loads.

CAUTION: A listed vent cap terminal adequately sized, must be used to evacuate the flue products from the building.

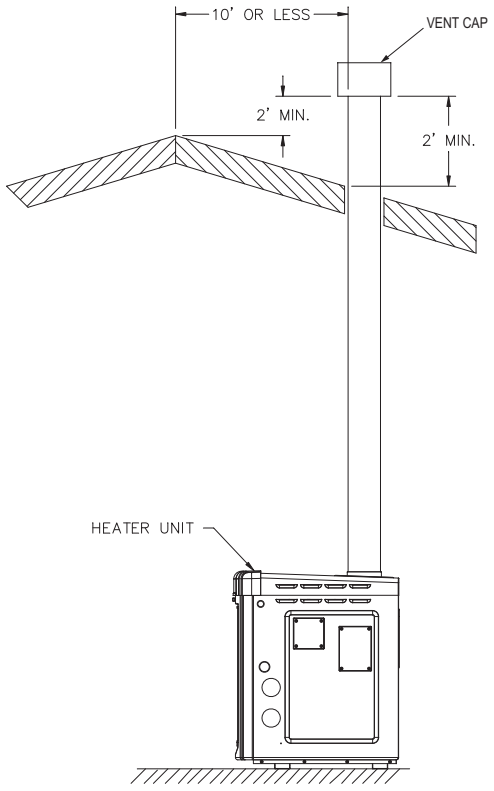

NOTE: *With venting application of two or more heaters, contact the factory.*

Horizontal Through-the-Wall Venting (Category III)

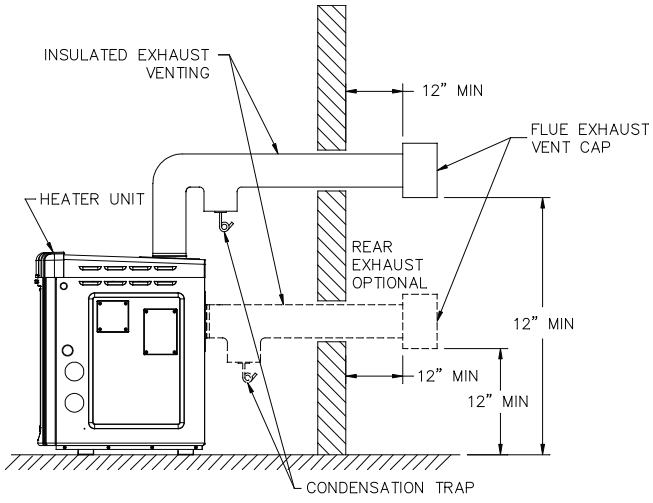

Horizontal Through-the-Wall Venting

CAUTION: This venting system requires the installation of a condensate drain in the vent piping per the vent manufacturer's instructions. Failure to install a condensate drain in the venting system will void all warranties on this heater.

Installation

These installations utilize the heater-mounted blower to vent the combustion products to the outdoors. Combustion air is taken from inside the room and the vent is installed horizontally through the wall to the outdoors. Adequate combustion and ventilation air must be supplied to the equipment room in accordance with the NFGC (U.S.) or B149 (Canada).

The total length of the horizontal through-the-wall flue system should not exceed 80 equivalent ft in length. If horizontal run exceeds 80 equivalent ft, an appropriately sized variable-speed extractor must be used. Each elbow used is equal to 10 ft of straight pipe. This will allow installation in one of the five following arrangements:

- 80' of straight flue pipe
- 70' of straight flue pipe and one elbow
- 60' of straight flue pipe and two elbows
- 50' of straight pipe and three elbows
- 40' of straight pipe and four elbows

The vent cap is not considered in the overall length of the venting system.

Model No.	Vent Size (in.)	Maximum Horizontal Vent Length (ft)*
409	6”	80
259		
409	5”	40
259		80
259	4”	40

* Subtract 10 ft. per elbow, maximum 4 elbows

The vent must be installed to prevent flue gas leakage. Care must be taken during assembly to ensure that all joints are sealed properly and are airtight. The vent must be installed to prevent the potential accumulation of condensate in the vent pipes. It is required that:

1. The vent must be installed with a condensate drain located in proximity to the heater as directed by the vent manufacturer.

2. The vent must be installed with a slight upward slope of not less than 1/4 inch per foot of horizontal run to the vent terminal.

Termination

The direct vent cap MUST be mounted on the exterior of the building. The direct vent cap cannot be installed in a well or below grade. The direct vent cap must be installed at least 1 ft above ground level and above normal snow levels. The Raypak-approved stainless steel direct vent cap must be used. The vent terminal must be located NO CLOSER than 12” off the wall.

WARNING: No substitutions of flue pipe or vent cap material are allowed. Such substitutions would jeopardize the safety and health of inhabitants.

Direct Vent - Horizontal Through-the-Wall

Installation

These installations utilize the heater-mounted blower to draw combustion air from outdoors and vent combustion products to the outdoors.

The total length of the through-the-wall flue cannot exceed 40 equivalent ft in length for the flue outlet. Each elbow used is equal to 10 ft of straight pipe. This

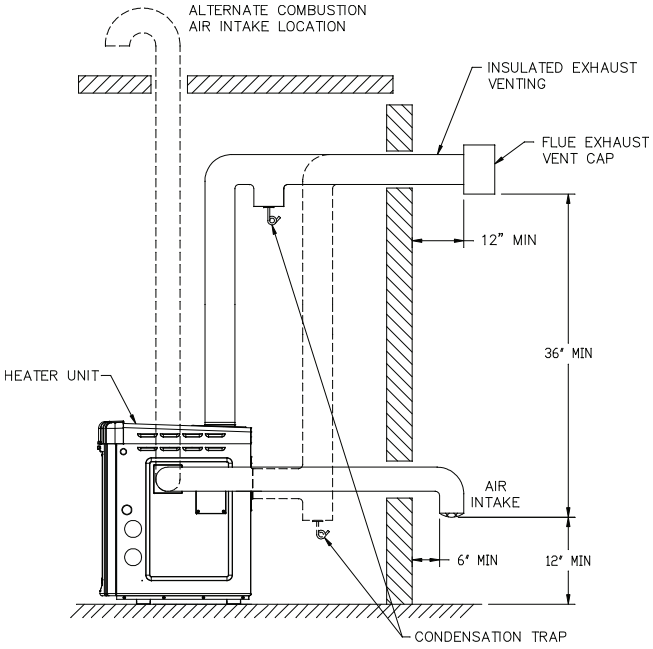

Horizontal Through-the-Wall Direct Venting

will allow installation in one of the five following arrangements:

- 80’ of straight flue pipe
- 70’ of straight flue pipe and one elbow
- 60’ of straight flue pipe and two elbows
- 50’ of straight pipe and three elbows
- 40’ of straight pipe and four elbows

The flue direct vent cap is not considered in the overall length of the venting system.

Care must be taken during assembly that all joints are sealed properly and are airtight.

The vent must be installed to prevent the potential accumulation of condensate in the vent pipes. It is required that:

1. The vent must be installed with a slight downward slope of not more than 1/4 inch per foot of horizontal run to the vent terminal.

2. The vent must be insulated through the length of the horizontal run.

For installations in extremely cold climate, it is required that:

1. The vent must be installed with a slight upward slope of not more than 1/4 inch per foot of horizontal run to the vent terminal. In this case, an approved condensate trap must be installed per applicable codes.

2. The intake vent must be insulated through the length of the horizontal run.

Termination

The flue direct vent cap MUST be mounted on the exterior of the building. The direct vent cap cannot be installed in a well or below grade. The direct vent cap must be installed at least 1 ft above ground level and above normal snow levels.

The direct vent cap MUST NOT be installed with any combustion air inlet directly above a direct vent cap. This vertical spacing would allow the flue products from the direct vent cap to be pulled into the combustion air intake installed above.

This type of installation can cause non-warrantable problems with components and poor operation of the heater due to the recirculation of flue products. Multiple direct vent caps should be installed in the same horizontal plane with a 4 ft clearance from the side of one vent cap to the side of the adjacent vent cap(s).

Combustion air supplied from outdoors must be free of particulate and chemical contaminants. To avoid a blocked flue condition, keep the vent cap clear of snow, ice, leaves, debris, etc.

WARNING: No substitutions of flue pipe or vent cap material are allowed. Such substitutions would jeopardize the safety and health of inhabitants.

CAUTION: Condensate is acidic and highly corrosive.

The stainless steel flue direct vent cap **MUST** be furnished by the heater manufacturer in accordance with its listing (sales order option D-15).

Use only the special gas vent pipes listed for use with Category III gas burning heaters, such as the AL29-4C stainless steel vents offered by Heat Fab Inc. (800-772-0739), Protech System, Inc. (800-766-3473), Z-Flex (800-654-5600) or American Metal Products (800-423-4270). Pipe joints must be positively sealed. Follow the vent manufacturer's installation instructions carefully.

Direct Vent—Vertical

Installation

These installations utilize the heater-mounted blower to draw combustion air from outdoors and force the heated flue products through the vent pipe under positive pressure. The vent material must be in accordance with the above instructions for vent materials. Vent material must be listed by a nationally recognized test agency.

The connection from the appliance flue to the stack must be as direct as possible and should be the same size or larger than the vent outlet.

See page 17 for Category I venting guidelines.

It is recommended that the intake vent be insulated in colder climates.

Termination

The flue terminal should be vertical and should terminate outside the building at least 2 ft above the highest point of the roof within 10 ft. The vent cap should have a minimum clearance of 4 ft horizontally from and in no case above or below (unless a 4 ft horizontal distance is maintained) electric meters, gas meters, regulators and relief equipment. The distance of the vent terminal from adjacent public walkways, adjacent buildings, open windows and building openings must be consistent with the NFGC (U.S.) or B149 (Canada).

WARNING: No substitutions of vent pipe or vent cap material are allowed. Such substitutions would jeopardize the safety and health of inhabitants.

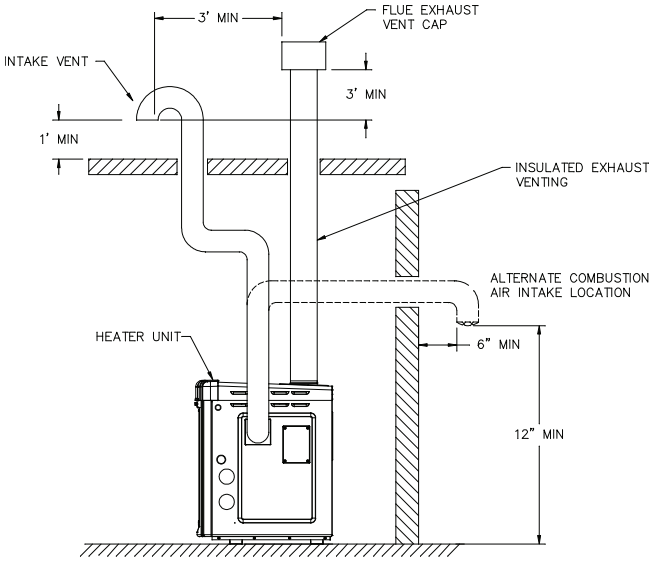

Direct Vent - Vertical

Model No.	Certified Vent Material	Vent Size (in.)	Maximum HorizontalVent Length (ft)**	Combustion Air Intake Pipe Material	Air Intake Max. Length** (ft) 4" Ø
409	Category III	6	80	Galvanized Steel, PVC, ABS, CPVC	80
259					
409		5	40		
259			80		
259		4	40		

** Subtract 10 ft per elbow. Max. 4 elbows.

Category III Horizontal Vent & Horizontal Direct Vent

Vent pipes supported only by flashing and extended above the roof more than 5 ft should be securely guyed or braced to withstand snow and wind loads.

The air inlet opening MUST be installed 1 ft above the roof line or above normal snow levels that might obstruct combustion air flow. This dimension is critical to the correct operation of the heater and venting system and reduces the chance of blockage from snow. The vent cap must have a minimum 3 ft vertical clearance from the air inlet opening.

Use only the special gas vent pipes listed for use with Category III gas burning heaters, such as the AL29-4C stainless steel vents offered by Heat Fab Inc. (800-772-0739), Protech System, Inc. (800-766-3473), Z-Flex (800-654-5600) or American Metal Products (800-423-4270). Pipe joints must be positively sealed. Follow the vent manufacturer's installation instructions carefully.

Outdoor Installation

The stackless top provided with the heater is the standard venting method for outdoor installations. The stackless top may be used in its standard top-mounted configuration or moved to the rear of the heater for a rear-exhaust configuration. See the diagram below.

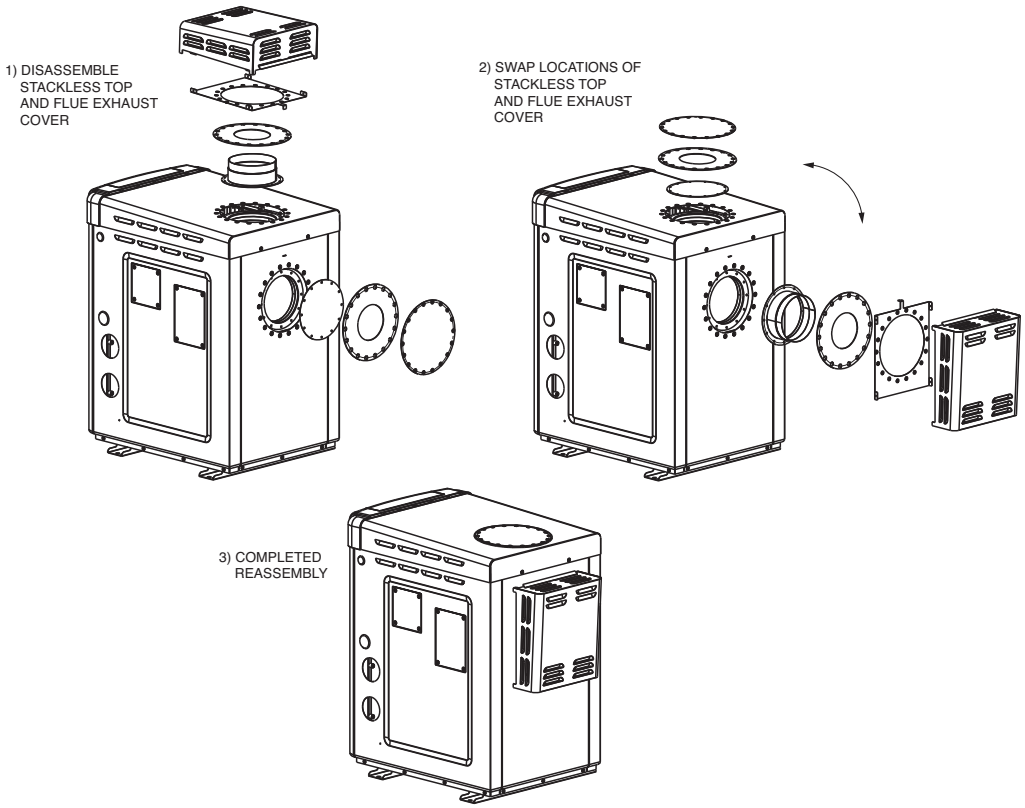
1) DISASSEMBLE STACKLESS TOP AND FLUE EXHAUST COVER
2) SWAP LOCATIONS OF STACKLESS TOP AND FLUE EXHAUST COVER
3) COMPLETED REASSEMBLY

Outdoor Venting - Conversion to Stackless Rear Exhaust

A few reasons why the rear stackless top may be considered are:

a) It reduces the chance of water infiltration, especially in snowy areas.

b) It relieves lot line restrictions.

c) It is easier to service the heater.

Care must be taken when locating the heater outdoors, because the flue gases discharged from the vent cap can condense as they leave the cap. Improper location can result in damage to adjacent structures or building finish. For maximum efficiency and safety, the following precautions must be observed:

1. Periodically check venting system. The heater's venting areas must never be obstructed in any way and minimum clearances must be observed to prevent restriction of combustion and ventilation air. Keep area clear and free of combustible and flammable materials.
2. Do not locate adjacent to any window, door, walkway, or gravity air intake. The vent must be located a minimum of 4 ft horizontally from such areas.
3. Install above grade level and above normal snow levels.
4. Vent terminal must be at least 3 ft above any forced air inlet located within 10 ft.
5. Adjacent brick or masonry surfaces must be protected with a rust-resistant sheet metal plate.

NOTE: Condensate can freeze on the vent cap. Frozen condensate on the vent cap can result in a blocked flue condition.

GAS SUPPLY CONNECTIONS

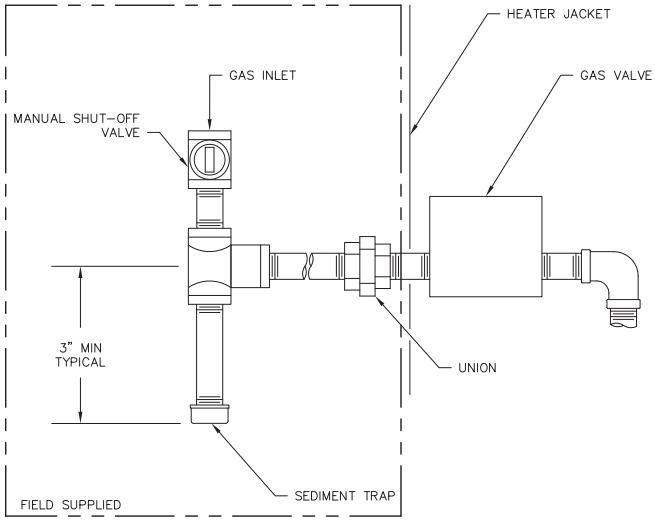

Gas piping must have a sediment trap ahead of the heater gas controls, and a manual shut-off valve located outside the heater jacket. All gas piping should be tested after installation in accordance with local codes.

CAUTION: *The heater and its manual shut-off valve must be disconnected from the gas supply during any pressure testing of that system at test pressures in excess of 1/2 psi (3.45 kPa). Dissipate test pressure in the gas supply line before reconnecting the heater and its manual shut off valve to gas supply line. FAILURE TO FOLLOW THIS PROCEDURE MAY DAMAGE THE GAS VALVE. OVER PRESSURIZED GAS VALVES ARE NOT COVERED BY WARRANTY. The heater and its gas connections shall be leak tested before placing the appliance in operation. Use soapy water for leak test. DO NOT use open flame.*

NOTE: *Do not use Teflon tape on gas line pipe thread. A pipe compound rated for use with natural and propane gases is recommended. Apply sparingly only on male pipe ends, leaving the two end threads bare.*

A minimum of 4 in. WC and a maximum of 10.5 "WC

SUPPLY PRESSURES

upstream pressure under load and no-load conditions must be provided for natural gas. A minimum of 12 "WC and a maximum of 14 "WC are required for propane gas under load and no-load conditions.

The factory manifold pressure settings should be -0.40" ± 0.1" WC for either natural or propane gas.

GAS PRESSURE ADJUSTMENT LOCATIONS

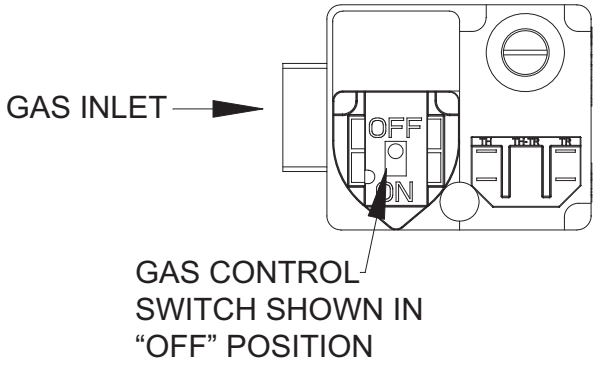

PIPE SIZING FOR GAS CONNECTIONS

Maximum Equivalent Pipe Length (ft)									
Natural Gas 1000 BTU/FT^3 0.60 Specific Gravity @ 0.5 in. WC Pressure Drop									
Propane Gas 2500 BTU/FT^3 1.53 Specific Gravity @ 0.5 in. WC Pressure Drop									
	Input	3/4"		1"		1-1/4"		1-1/2"	
Model	(KBTU)	N	P	N	P	N	P	N	P
259	250.0	15	35	50	125	210	480	445	
409	399.0	*	15	20	55	95	225	215	480

*A 3/4" gas line can be used for up to 5 ft maximum length from the gas valve in addition to the sediment trap.

HEAT EXCHANGER PRESSURE DROP TABLES

BRASS HEADER		
FLOW GPM	PRESSURE DROP (FT OF HEAD)	
	259	409
20		
25	4.4	
30	5.2	
35	5.3	
40	5.4	9.9
50	5.8	10.2
60	6.4	10.8
70	7.6	11.6
80	8.6	12.5
90	10.6	13.6
100	11.8	15.0
110	21.0	23.5
120	26.0	28.5
125	28.0	30.0

FLOW RATES

MODEL	PIPE SIZE	MIN. GPM	MAX. GPM*
259	1-1/4"–1-1/2" - 2"	25	125
409	1-1/4"–1-1/2" - 2"	40	125

*When flow rates exceed maximum GPM an external auxiliary bypass valve is required. See external bypass valve section for details.

INTERNAL AUTOMATIC BYPASS VALVE

A built-in automatic bypass valve is provided in the in/out header. The internal bypass valve automatically responds to changes in water flow in the piping system. Proper amount of water is maintained through the heater under varying flows dictated by the conditions of the pump and filter.

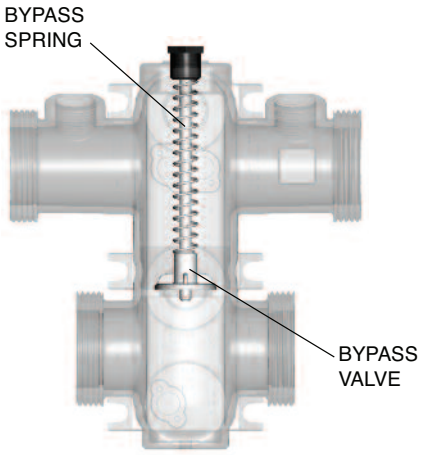

EXTERNAL AUXILIARY BYPASS VALVE
(Where Required)

An auxiliary bypass valve should be used when flow rates exceed 125 GPM. Usually a high-performance pump size larger than two horsepower will exceed this flow rate. This valve is required to complement the function of the automatic bypass valve, particularly when starting the heater in winter or early spring when the spa or pool temperature is below 50°F. It also serves to eliminate needless pressure drop through the heater and accompanying reduction in the flow rate to the spa jets, etc.

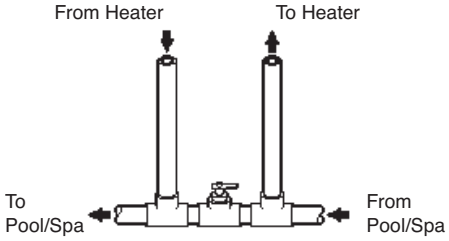

AUXILIARY BYPASS VALVE
(DO NOT USE GATE VALVE)

AUXILIARY BYPASS VALVE ADJUSTMENT

To set bypass: With clean filter, adjustment is made by feeling the inlet and outlet pipes at the heater. Outlet pipes should be slightly warmer than inlet and comfortable to the touch. If pipe is hot, close bypass; if cold, open bypass.

PRESSURE RELIEF VALVE INSTALLATION

To conform to local building codes, it may be necessary to install a 3/4" pressure relief valve, having a capacity at least equal to the BTUH output of the model. The maximum acceptable pressure relief valve setting is 125 psi.

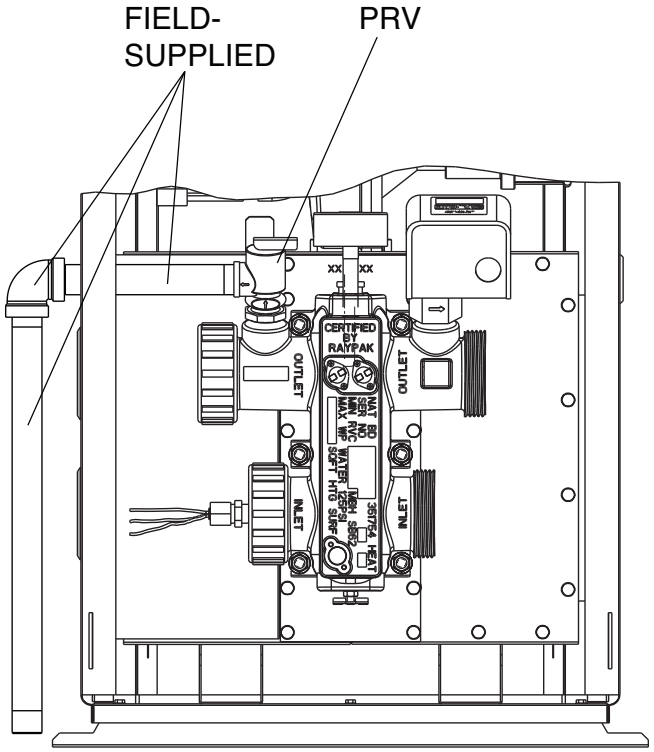

NOTE: *To avoid water damage or scalding due to valve operation, drain pipe must be connected to valve outlet and run to a safe place of discharge. Drain pipe must be the same size as the valve discharge connection throughout its entire length and must pitch downward from the valve. No shut-off valve shall be installed between the relief valve and the drain line. Valve lever should be tripped at least once a year to ensure that waterways are clear.*

ELECTRICAL WIRING

NOTE: *If it is necessary to replace any of the original wiring, use 105°C wire or its equivalent, and/or 150°C wire or its equivalent, like the original wiring.*

WARNING: *Heaters are factory-wired for* ***240 VAC*** *power supply.* ***DO NOT attempt to operate with a 208 VAC nominal supply.***

CAUTION: *Heater must be electrically grounded and bonded. Bonding lug is provided loose with the heater. Install bonding lug on lower right or left side of jacket as necessary for bonding the heater. Mounting hole is provided on the jacket.*

NOTE: Failure to ground the heater electrically could affect the heater's electronics.

The Electronic Intermittent Ignition Device automatically lights the main burner upon a call for heat. The heater is supplied with a dual-voltage transformer for 120 VAC or 240 VAC input power hookup.

NOTE: See page 40 for further instructions if using a time clock/fireman's switch.

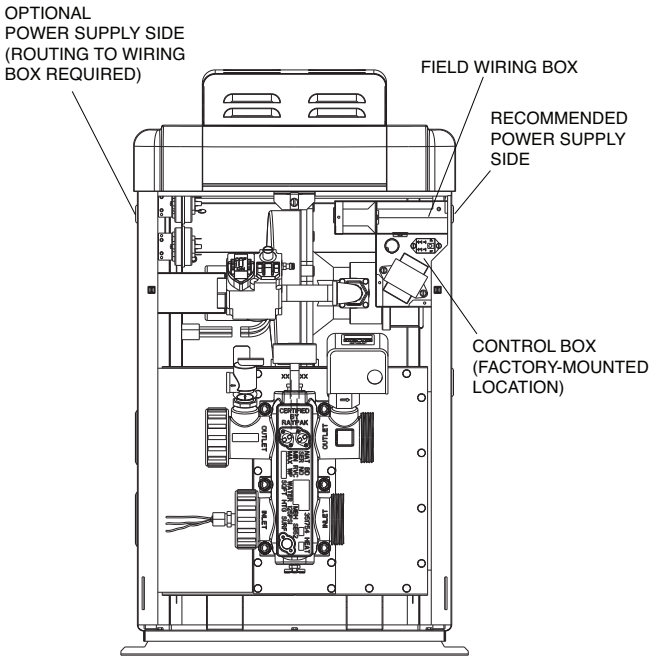

Wiring locations

TRANSFORMER WIRING

120 VAC WIRING

For 120 VAC input power to the unit, connect the pair of black wires to the “L1” or hot leg of the power supply. Connect the red/white wire and the white wire to the “Ret” or neutral leg of the power supply. Attach the wire nut to the red wire. **There should be no connection to the red wire for 120 VAC operation.**

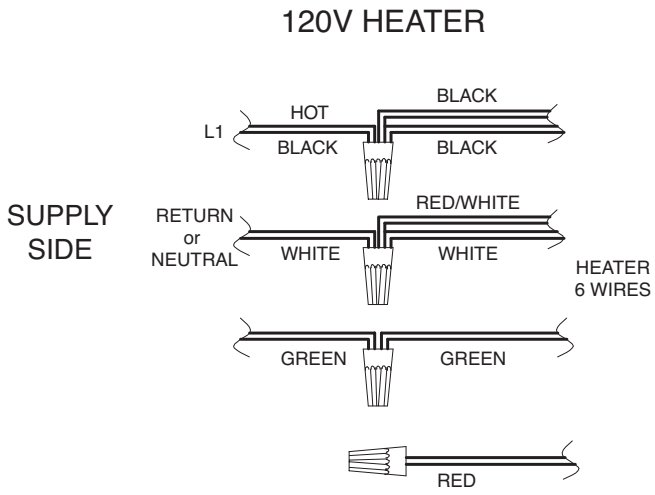

240 VAC WIRING

For 240 VAC input power to the unit, connect the pair of black wires to the “L1” or hot leg of the power supply. Connect the red/white wire and the red wire to the “L2” or second hot leg of the power supply. Attach the wire nut to the white wire. **There should be no connection to the white wire for 240 VAC operation.**

WARNING: DO NOT attempt to operate the heater with 208 VAC supply voltage.

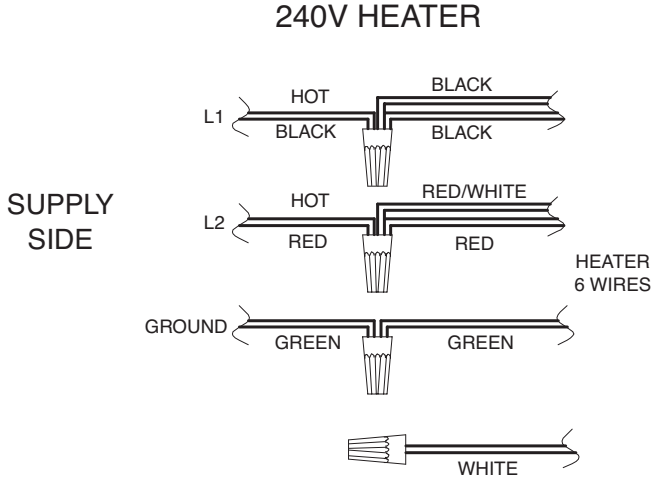

The heater must be electrically grounded and bonded in accordance with local codes, or, in the absence of local codes, with the latest edition of the National Electrical Code, ANSI/NFPA 70. (Canada - Canadian Electrical Code, CSA C22.1, Part 1 and Part 2.)

NOTE: If the transformer’s primary side is wired for 120 VAC and 240 VAC is applied, damage to the transformer and PC board may result. Such damages are not covered under manufacturer’s limited warranty.

NOTE: Input power to the heater (120 or 240 VAC) can be supplied from the load (pump) side of time clock or directly from the GFCI power source. **It is required that full-time power be supplied to the heater from the GFCI power source, and that the heater be controlled by the fireman’s switch connection or using a two or three-wire remote. See pages 38-40.** If using a switched GFCI power source, the heater post purge function will be bypassed, adversely affecting heater operation and life.

OPTIONAL LEFT-HAND WIRING

If the standard right-hand electrical wiring is not accessible or convenient, wiring can be done from the left-hand side instead. Conversion is done using the following method:

1. Locate the plug on the left-hand side of the unit.
2. Remove plug and set aside.
3. Locate the junction box. Remove the screw holding the cover in place and set the cover aside.
4. Pull the bundle of heater wires back in from the right jacket panel.
5. Remove the grommet from right panel and replace with the plug from the left-hand side.
6. Route supply lines from the left side and through the provided loops under the control panel (see image).
7. See provided wiring tag for correct connection points.
8. Reinstall the junction box cover when completed.

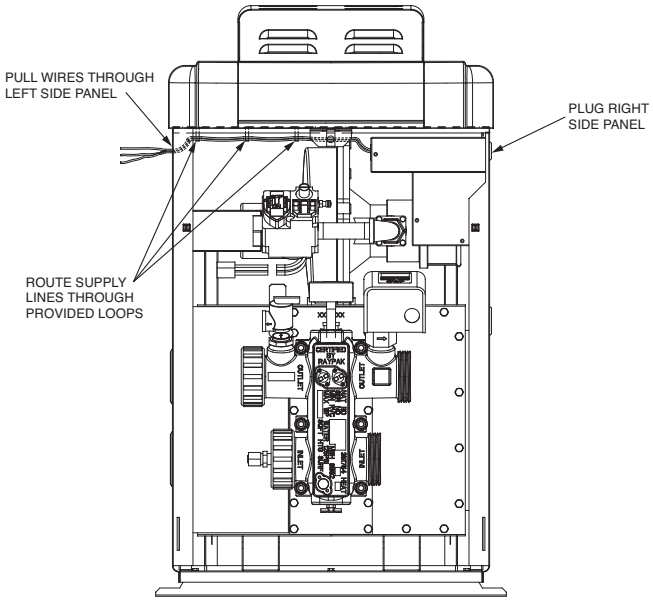

Optional left-hand wiring

PLUMBING—WATER CONNECTIONS

The heater has standard right-hand plumbing connections, but can be converted to alternate configurations as shown below.

STANDARD RIGHT-HAND CONNECTIONS

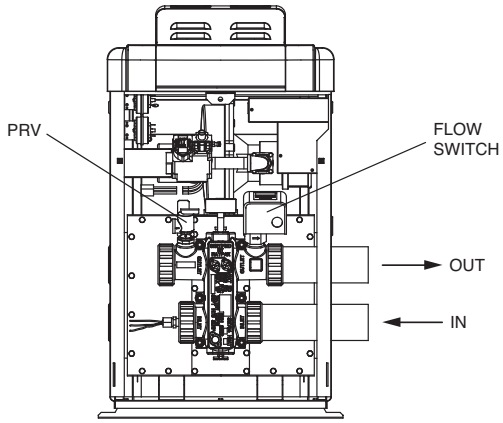

LEFT-HAND CONNECTIONS

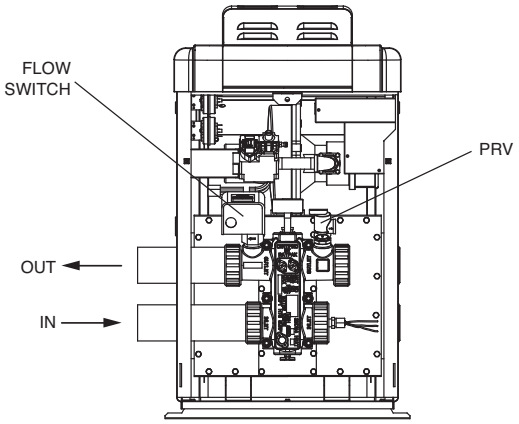

LEFT-IN / RIGHT-OUT CONNECTIONS

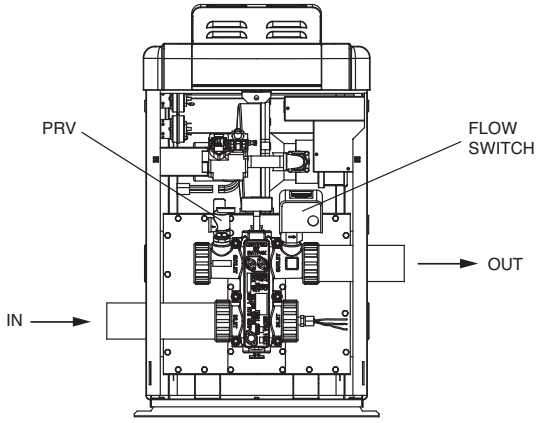

RIGHT-IN / LEFT-OUT CONNECTIONS

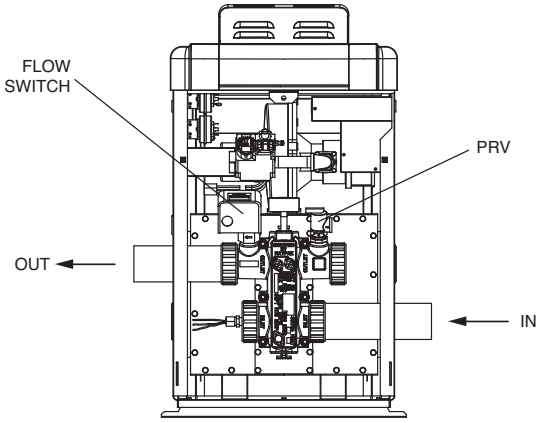

The conversion is performed using the following procedures:

WARNING: Before performing any conversion steps, make sure that all electrical power to the heater has been turned OFF.

LEFT HAND PLUMBING

1. Rotate and remove the PRV and reducer bushing from In/Out Header.
2. Rotate and remove the T&P Gauge.
3. Remove cover from Flow Switch and disconnect wiring.
4. Rotate and remove Flow Switch from In/Out header.
5. Relocate PRV and reducer bushing to where the Flow Switch was located.
6. Tighten down PRV and position outlet toward the right jacket side.
7. Relocate Flow Switch to where the PRV was located.
8. Tighten down Flow Switch and position the arrow on the flow switch to the left jacket side.
9. Rewire Flow Switch, one lead on C (common), the second on NO (normally open).
10. Place cover over Flow Switch and tighten down screw.
11. Re-install the T&P Gauge.
12. Remove thermostat sensor from Jaco fitting and set aside.
13. Remove both CPVC Ring Nuts and Plugs.
14. Relocate and tighten both CPVC Ring Nut and Plugs to the right side of the In/Out Header. Note: Jaco fitting plug must be located on the Inlet side.
15. Reroute and install the thermostat sensor to the right side of the In/Out Header.

LEFT INLET / RIGHT OUTLET PLUMBING

1. Remove thermostat sensor from Jaco fitting and set aside.
2. Remove Inlet CPVC Ring Nut and Plug.
3. Relocate and tighten CPVC Ring Nut and Plug to the right side of the In/Out Header.
4. Reroute and install the thermostat sensor to the right side of the In/Out Header.

RIGHT INLET / LEFT OUTLET PLUMBING

1. Rotate and remove the PRV and reducer bushing from In/Out Header.
2. Rotate and remove the T&P Gauge.
3. Remove cover from Flow Switch and disconnect wiring.
4. Rotate and remove Flow Switch from In/Out header.
5. Relocate PRV and reducer bushing to where the Flow Switch was located.
6. Tighten down PRV and position outlet toward the right jacket side.
7. Relocate Flow Switch to where the PRV was located.
8. Tighten down Flow Switch and position the arrow on the flow switch to the left jacket side.
9. Rewire Flow Switch, one lead on C (common), the second on NO (normally open).
10. Place cover over Flow Switch and tighten down screw.
11. Re-install the T&P Gauge.

LOOSE PLUMBING PARTS SETUP

The loose parts bag contains the pieces needed to connect your plumbing to the heater. Two options are recommended for the installer as shown in the following images.

NOTE: Use appropriate CPVC primer and glue for attachments.

STRAIGHT PLUMBING SETUP
(FRONT VIEW)

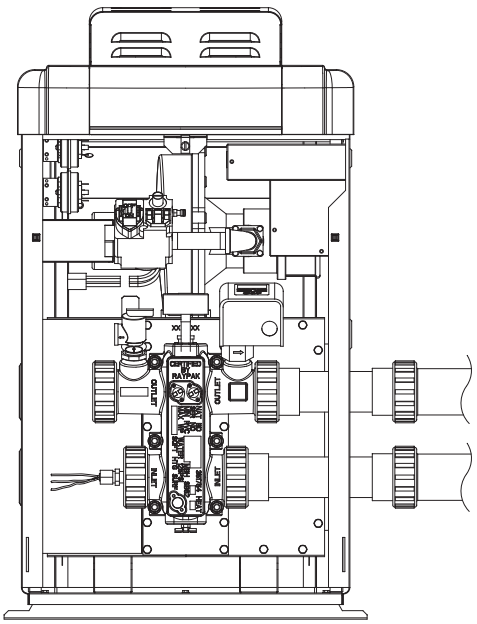

90° PLUMBING SETUP
(TOP VIEW)

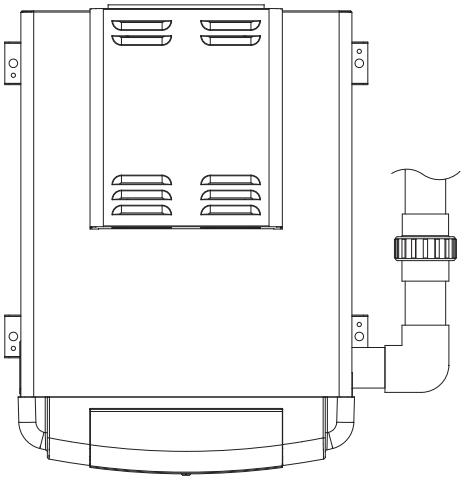

Recommended plumbing setups

Single Pool or Spa Heater Installation

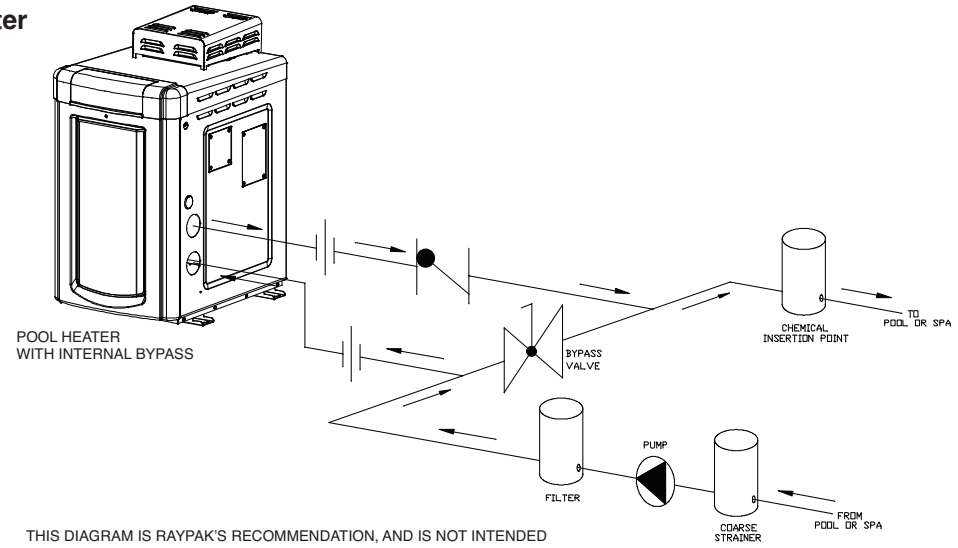

THIS DIAGRAM IS RAYPAK'S RECOMMENDATION, AND IS NOT INTENDED
TO REPLACE AN ENGINEERED PIPING SYSTEM BY A PROFESSIONAL ENGINEER.

Multiple Pool or Spa Heaters Installation

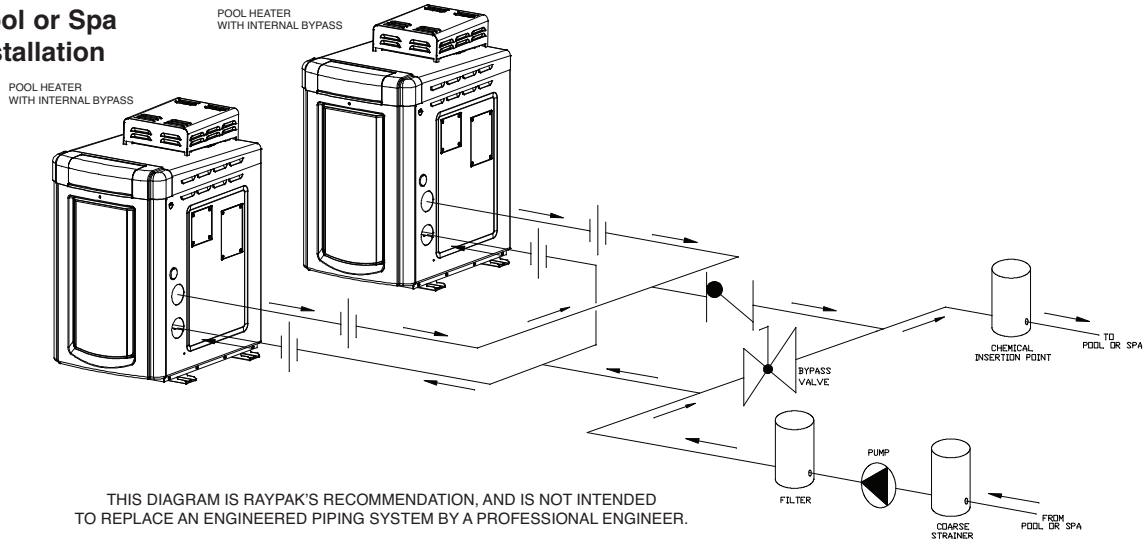

THIS DIAGRAM IS RAYPAK'S RECOMMENDATION, AND IS NOT INTENDED
TO REPLACE AN ENGINEERED PIPING SYSTEM BY A PROFESSIONAL ENGINEER.

Single Pool/Spa Heater Installation

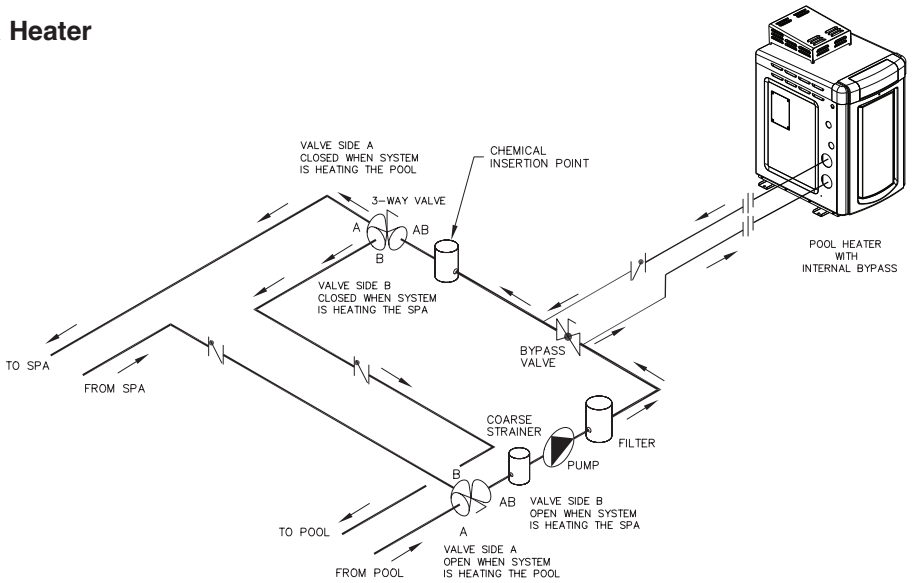

THIS DIAGRAM IS RAYPAK'S RECOMMENDATION AND IS NOT INTENDED TO REPLACE AN ENGINEERED PIPING SYSTEM BY A PROFESSIONAL ENGINEER.



Multiple Pool/Spa Heaters Installation

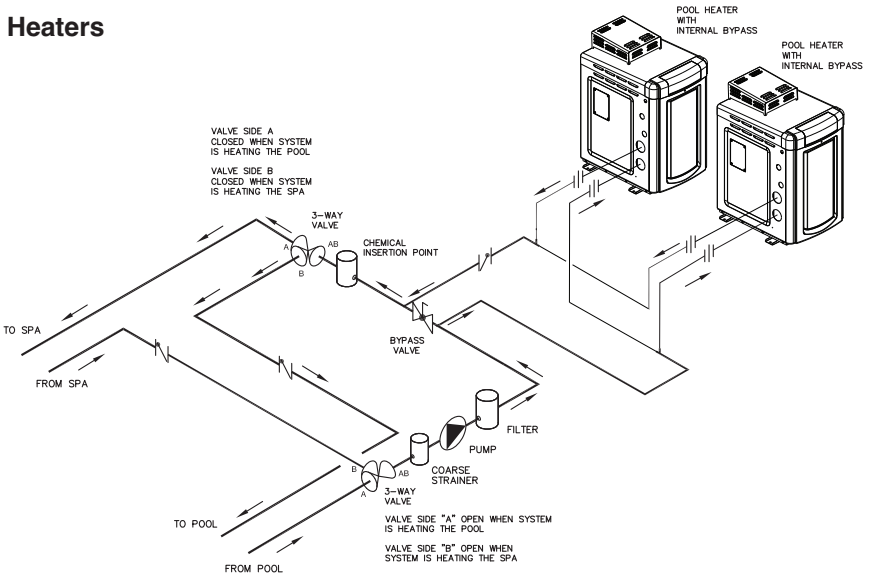

THIS DIAGRAM IS RAYPAK'S RECOMMENDATION AND IS NOT INTENDED TO REPLACE AN ENGINEERED PIPING SYSTEM BY A PROFESSIONAL ENGINEER.

The heater requires water flow and positive pressure to fire and operate properly. It must therefore be installed downstream of the discharge side of the filter pump. A typical installation is plumbed as follows:

1. The inlet side of the filter is plumbed directly to the discharge side of the filter pump;
2. The outlet side of the filter is then plumbed to the inlet of the heater; and
3. The outlet of the heater is plumbed to the return line to the pool or spa. The pump, filter and heater are thus plumbed in series (Salt generators and chemical feeders must be down stream of the pool heater).

Plumbing from the heater back to the pool or spa must not have any valves or restriction that could prevent flow when the pump is operating.

CAUTION: An additional source of heated water, e.g. a solar system, must be connected to the main line ahead of the heater inlet pipe in order for it to act as the primary heat source. If the primary system provides adequate heat to maintain set-point, the heater will not fire. Be advised that the control panel will then display sensed water temperatures downstream of the primary heating system, rather than the temperature of the water exiting the pool.

Heater must be located so that any water leaks will not damage the structure of adjacent area. PVC pipe may be glued directly into header unions.

WIRING DIAGRAM

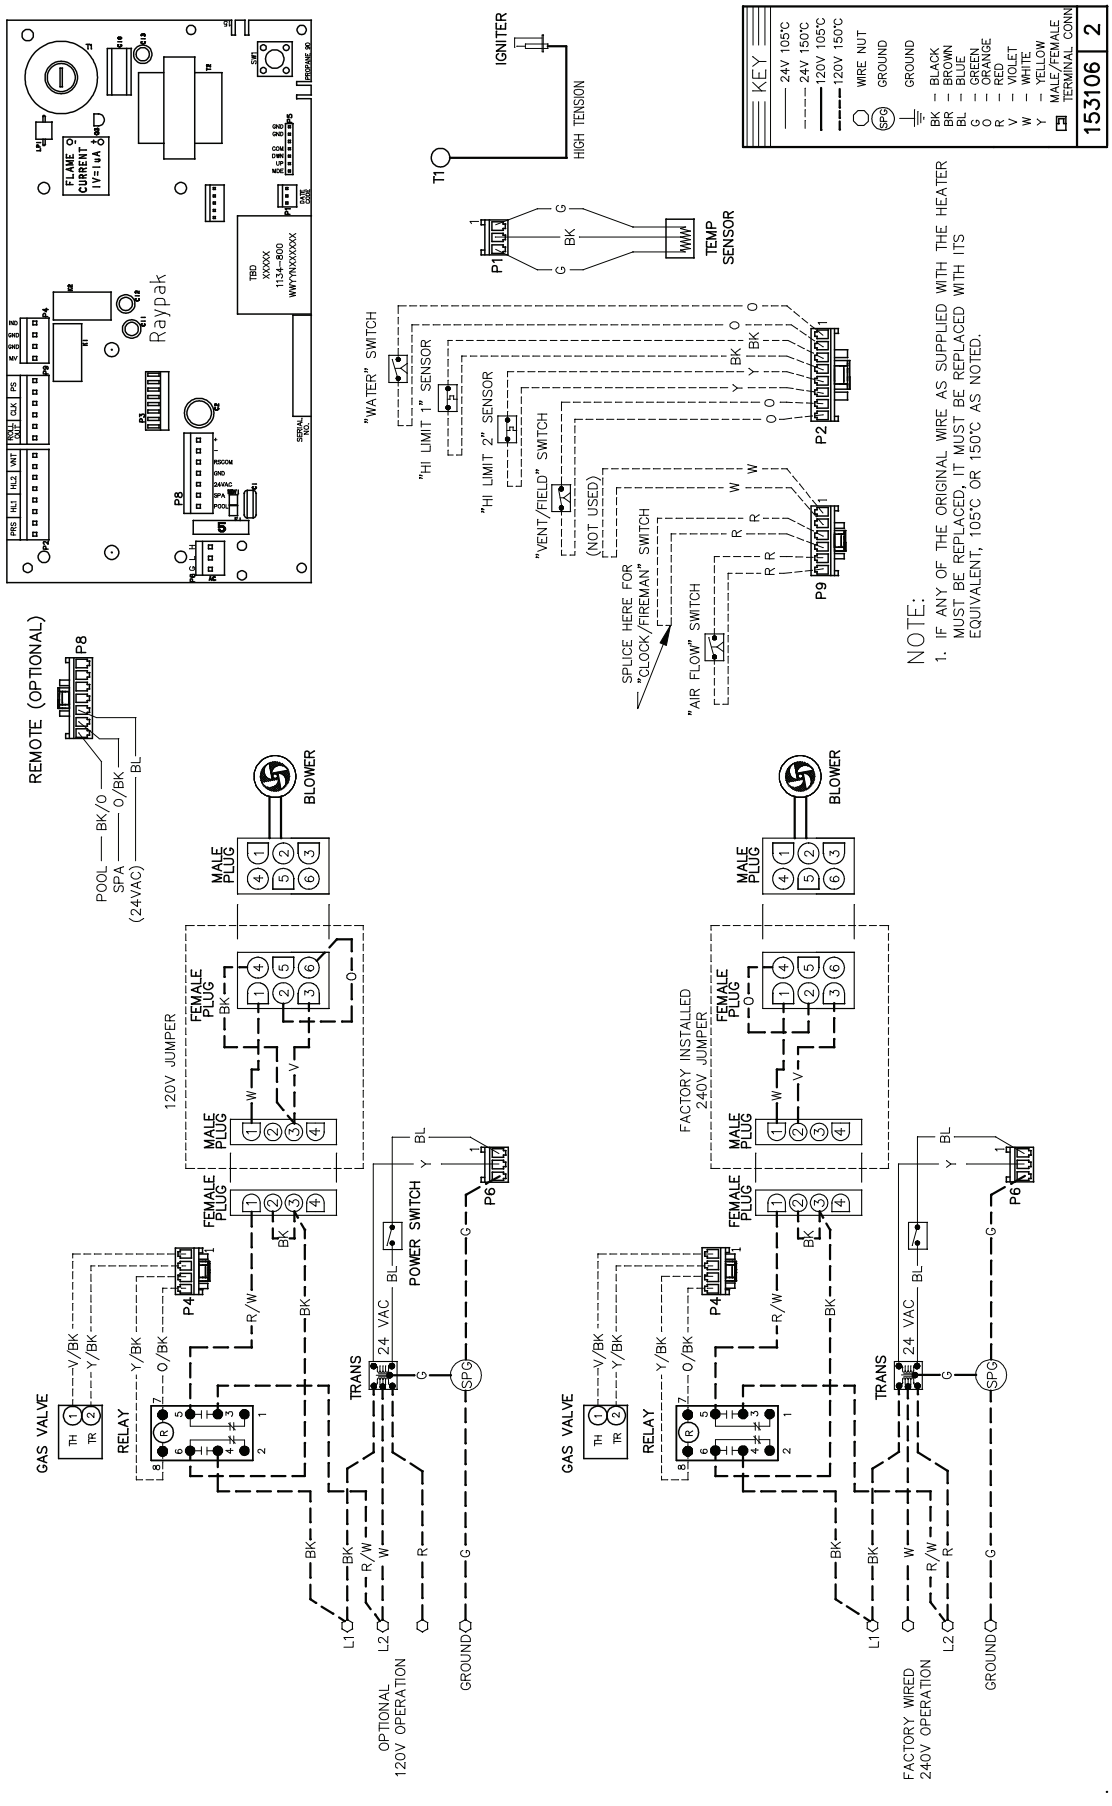

SECTION 4 - SERVICING INSTRUCTIONS

GENERAL LOCATION OF CONTROLS

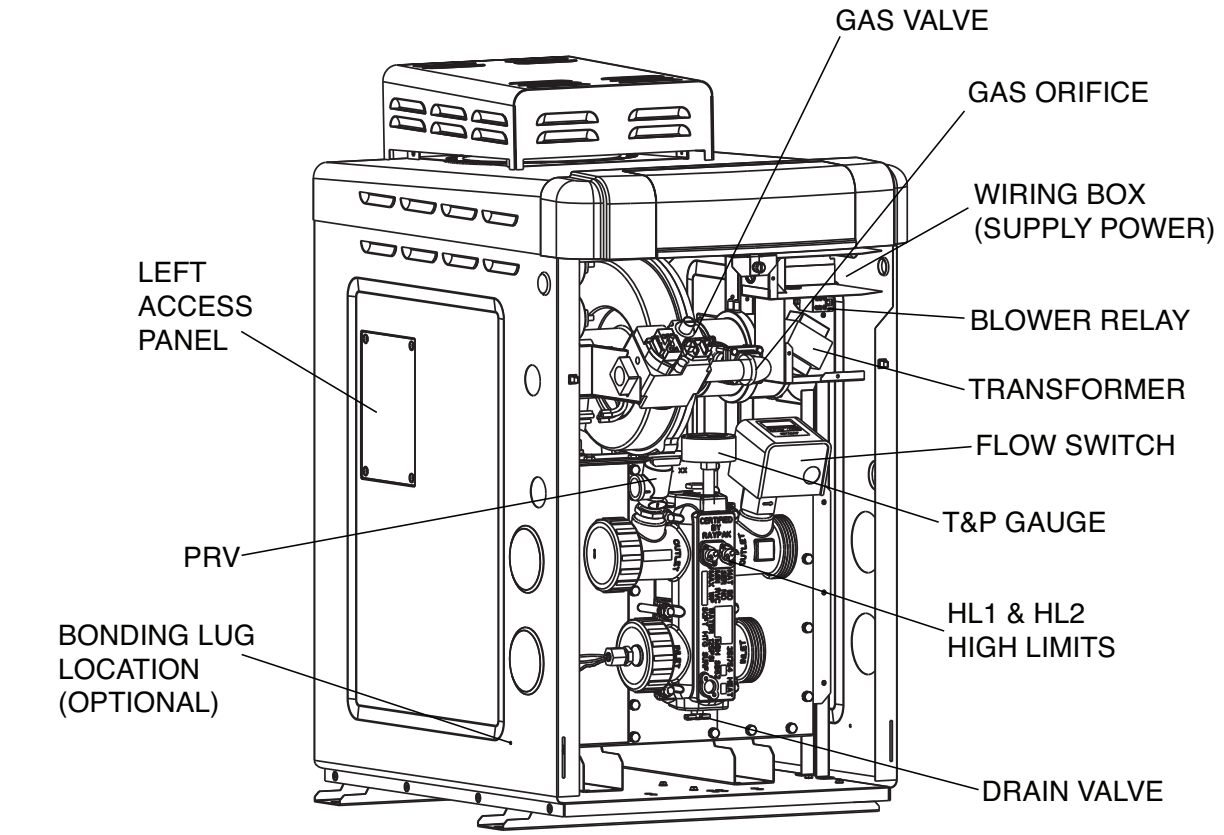

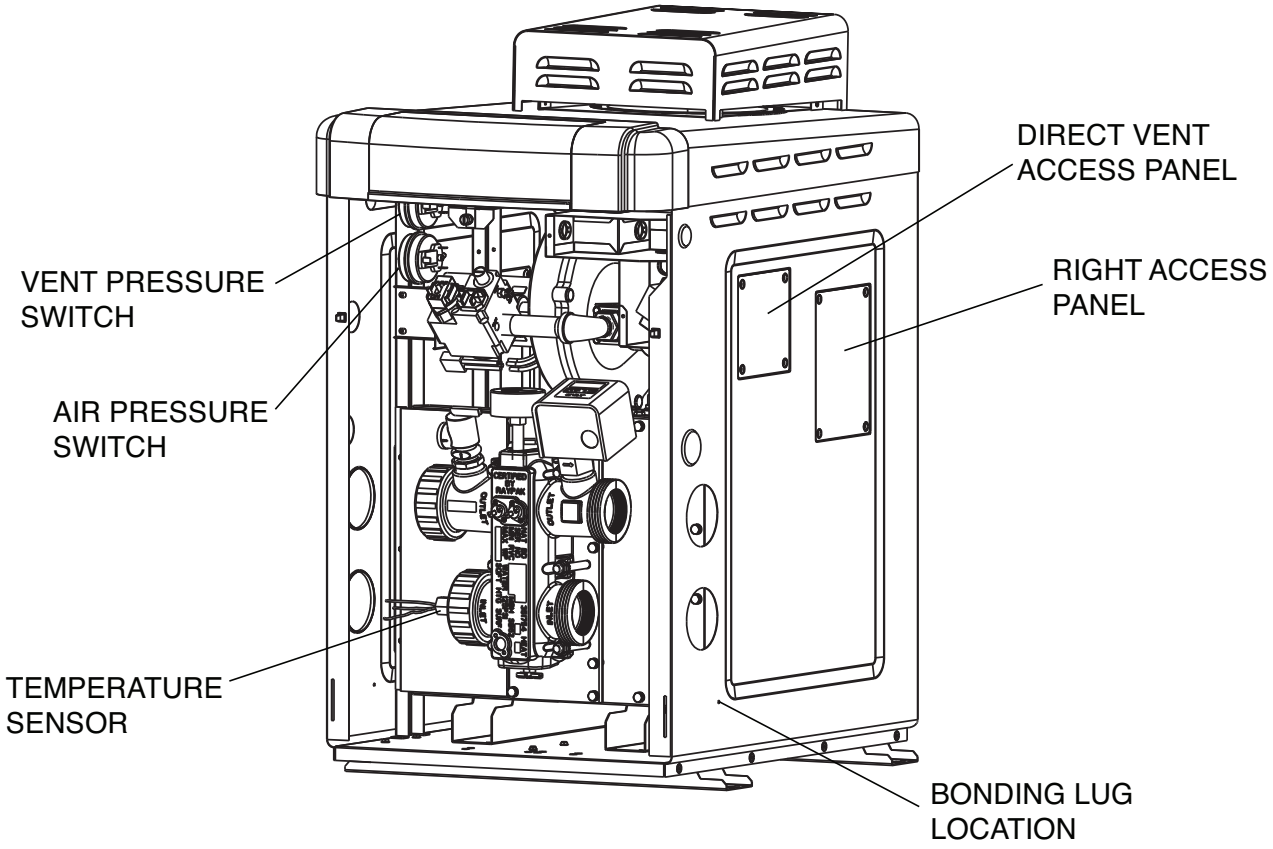

CONTROL ADJUSTMENTS

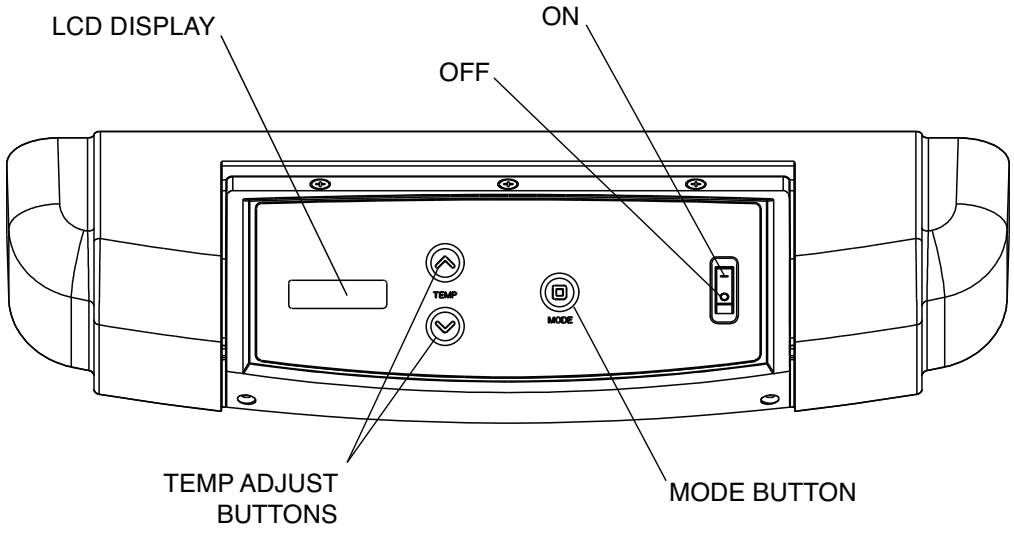

CONTROL PANEL REMOVAL

To remove the PC board from the heater, use the following procedure:

1. Turn off main power to the heater.
2. Remove front door to access wire harnesses.
3. Reaching underneath the PC board, carefully remove all connectors and wires from the PC board and ON/OFF toggle switch.
4. Lift the front bezel lid and remove the two lower Phillips screws.
5. Carefully lift the control panel upwards and pull away from the heater.
6. The control panel can now be flipped around to remove or inspect the PC board.
7. Reverse procedure for re-installation.

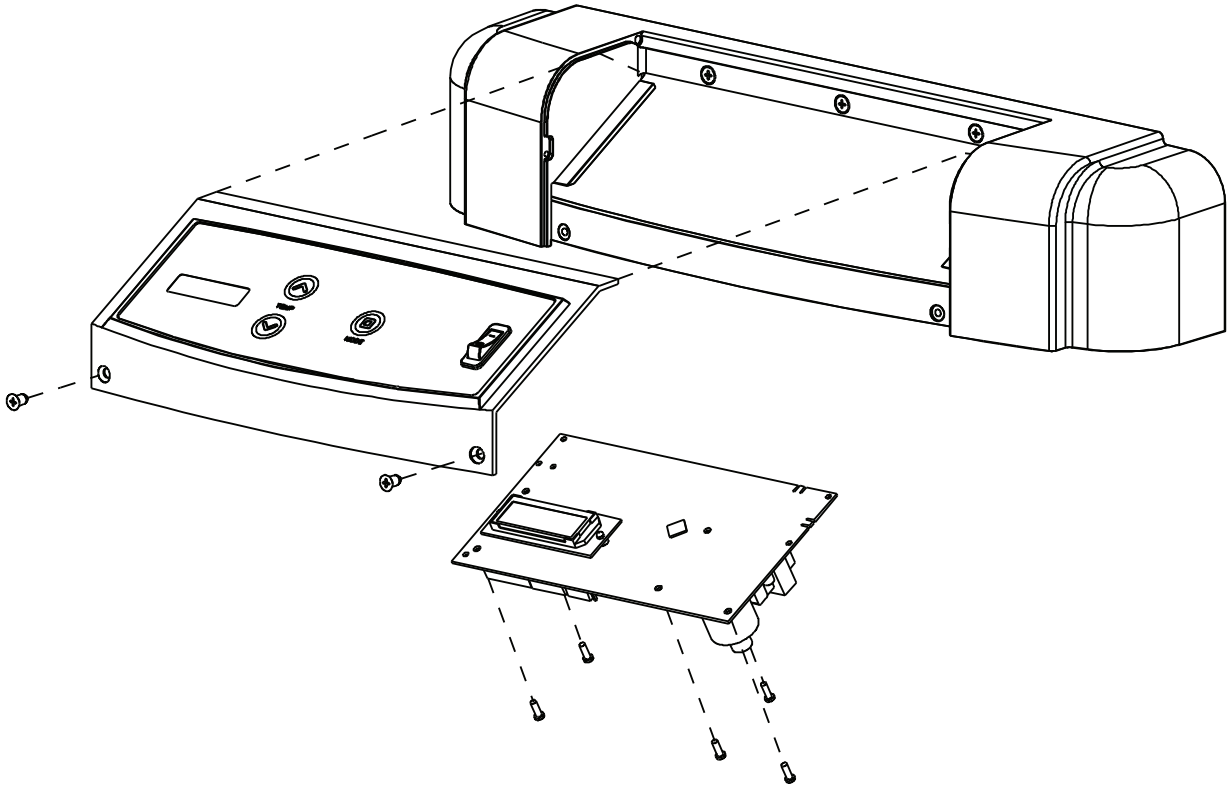

THERMOSTAT OPERATION - DIRECT SPARK (DS) BOARD

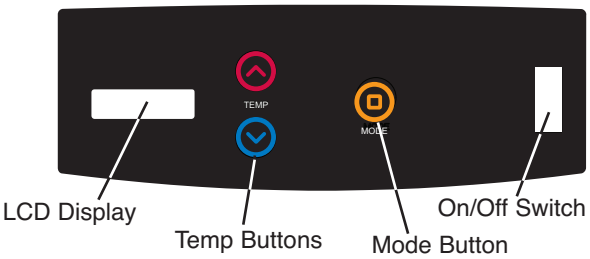

The pool heater touchpad, located on the upper front panel of the heater, allows the user to select either POOL or SPA operation, and to adjust the setpoint temperature. The LCD display window indicates the mode (OFF, SPA, POOL) and the actual water temperature. A manual power switch provided turns the control power ON or OFF.

Mode Button

The MODE button is used to select either POOL or SPA operation. It also allows the user to turn the heater off electronically, allowing the LCD display to remain energized and to continue showing the actual water temperature.

Temp Buttons

If the heater is in POOL or SPA mode, the desired water temperature (SETPOINT) will also be displayed and may be adjusted using the UP or DOWN buttons.

Operation

In the POOL or SPA modes, the actual water temperature is displayed along with the desired water temperature (SETPOINT). When the water temperature is above the setpoint, “Water Temp” will alternate with “No Demand.” When the water temperature is below the setpoint and the heater is firing, “Water Temp” will alternate with “Heating.”

To adjust the setpoint temperature, make sure the control is in the appropriate mode (POOL or SPA) and push the UP or DOWN buttons.



ALTERNATING DISPLAYS DURING HEATING

Service Menu and Fault History

To access the Service Menu and fault history, press the MODE and UP buttons simultaneously for 3 to 5 seconds. The heater will continue to operate normally while in the Service Menu. The first screen displayed is the Flame Strength indicator, which indicates

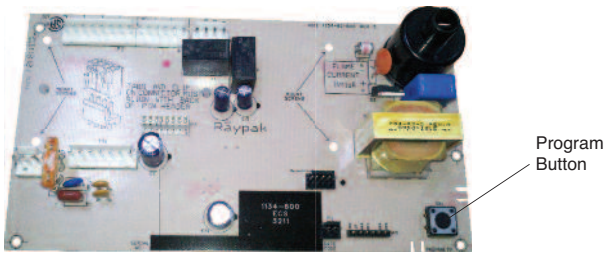

the pilot flame current using a bar graph and numerical display. A signal of less than 4 indicates a weak flame signal and may require service. Refer to Section 5 – Troubleshooting for possible causes and corrections.

FLAME STRENGTH INDICATOR

Press the DOWN button. The Supply Voltage screen indicates the voltage supplied to the control board. Normal readings range from 24 to 29 volts.



SUPPLY VOLTAGE INDICATOR

Press the DOWN button. The Run Time indicates the total hours of operation for the pool heater, as measured by the amount of time that the main gas valve has been powered. The Cycle count indicates the number of on/off cycles of the heater, as measured by the number of times the pilot valve has been powered.



RUN TIME INDICATOR

Press the DOWN button. The Fault History can display up to ten faults in memory. The order of the faults begins with “Fault Last,” which is the most recent fault, and proceeds through ten most recent messages in chronological order. The second line of the display shows the fault message. If there are no faults in the history buffer, the second line reads “All Faults Clear.”



FAULT HISTORY

Program Button

1) Follow the instructions on page 34 to remove the control panel. Locate the Program Mode button (marked as SW1) as shown on page 35. Press and hold the button (5-7 seconds) until **Set Factory Defaults** appears on the display. Release the program button.

2) Press the MODE button sequentially until the desired program event is reached. There are 5 different events that can be programmed. They appear in the sequence listed below:

Resets board to factory default settings.

Resets faults in the History File.

Change from Fahrenheit to Celsius.

SPA setpoint maximum adjustment.

POOL setpoint maximum adjustment.

Set Factory Defaults

Refer to step one above to access the program screen. **Set Factory Defaults** should appear on the screen. If it does not, press the MODE button until **Set Factory Defaults** appears on the digital display. Press and hold both UP and DOWN buttons for 5-7 seconds until **Defaults Set** appears. This operation resets the operating program to its factory default values. Both the POOL and SPA setpoints will revert to 65°F (18.5°C) and both POOL and SPA maximum temperature settings will be 104°F (40.0°C). The Control Lockout PIN will be cleared and the control will resume normal operation.

Clear Faults

Refer to step one above to access the program screen. Press the MODE button until **Clear Faults** appears on the digital display. Press and hold both UP and DOWN buttons for 5-7 seconds until **Faults Cleared** appears. This operation resets the Fault History file to "0" and clears all the stored faults.

Fahrenheit or Celsius

Refer to step one above to access the program screen. Press the MODE button until **Fahrenheit** or **Celsius** appears on the digital display. The digital display is capable of displaying Celsius as well as Fahrenheit temperatures. The UP or DOWN buttons will select **Fahrenheit** or **Celsius** on the temperature display. Choose the desired temperature scale.

Spa Max Temp – Spa Set Point Maximum Adjustment

Refer to step one above to access the program screen. Press the MODE button until **Spa Max Temp** appears on the digital display. Using the UP and DOWN buttons will change the Maximum Temperature Setting to your desired value. The control can be set for a maximum of 107°F.

Pool Max Temp – Pool Set Point Maximum Adjustment

Refer to step one above to access the program screen. Press the MODE button until **Pool Max Temp** appears on the digital display. Using the UP and DOWN buttons will change the Maximum Temperature Setting to your desired value. The control can be set for a maximum of 107°F.

Control Lockout

The heater is equipped with a Control Lockout feature to prevent unauthorized tampering or adjustment of the control settings. To lock out the controls, press the DOWN button and MODE button for 5 seconds. Choose a three digit PIN, using the UP and DOWN buttons to select the digits and the MODE button to lock in selections. Confirm your selection and record your PIN.

To unlock the controls, press any button to bring up the **Enter PIN** menu. Enter the PIN that was used to lock the control. Note that power cycling will **not** clear the lockout. Successfully unlocking the control will display "Lockout Cleared." Failure to enter the correct PIN will display "Invalid PIN."

In the event that the user-selected PIN is lost or does not clear the Control Lockout, use the Program Button to **Set Factory Defaults**. This will clear the PIN and allow normal operation and selection of a new PIN if desired. See the **Program Button** directions on this page for details.

NOTE: Both the POOL and SPA setpoints will revert back to 65°F (18.5°C) and the POOL and SPA maximum temperature settings will be 104°F (40.0°C). These setpoints will need to be readjusted to desired settings.

NOTE: The LCD temperature display may not agree with the temperature reading of your pool or spa thermometer. The heater reads the water temperature at the inlet. Due to the circulation characteristics of any pool or spa, the water temperature at the inlet to the heater may differ from that observed at a given location in the pool or spa.

STATUS AND DIAGNOSTICS

The digital thermostat models are programmed to display a variety of status and diagnostic messages, depending on the operating conditions.

The following heat status messages are displayed in Pool, Spa, and Remote modes when there are no active fault conditions.

Display	Condition
Heating	Call for heat established, flame present
Spark	Spark operating
No Demand	Heat demand is satisfied or the unit is in its 30 second post-purge timeout
Pre Purge	Blower is powered for a 45 second purge prior to trial for ignition.

The following conditions are displayed in Pool, Spa and Remote modes.

Display	Condition
Sensor Failure	Thermistor temperatures disagree by more than 2°F
Sensor Open	Thermistor sensor failed open. (Below -25°F)
Sensor Short	Thermistor sensor failed short. (Above 213°F)
Flame w/o CFH	Board is sensing flame when both main and pilot valves are commanded shut.
MV Output Fault	Main gas valve output is not in commanded state.
Internal Fault	Board fault, replace board.
EEPROM Fault	Memory fault. Cycle power and reset set points. Replace board if fault does not clear.
Clock/ Fireman Sw	Time clock/fireman switch circuit is open.
Low Temp Lockout	Water temperature below 36°F.

The following conditions are displayed only while there is a demand for heat present.

Display	Condition
Water Sw Open	Water flow switch open.
Blocked Vent	Blocked switch is open.
Hi Limit 1 Fault	High limit 1 open.
Hi Limit 2 Fault	High limit 2 open.
Vent Temp Limit	Unused spare circuit is open.
Air Flow Sw Open	Air pressure switch not closed within 10 seconds of blower activation.
Air Flow Sw Closed	Air pressure switch is closed prior to the blower being turned on.
Fan Lockout	3 fan switch faults within same heat demand cycle, power must be cycled to clear the fault.
Ignition Lockout (Propane Tab Broken)	**Alternating with "Ign Failure" -** Failure to ignite and sense flame in 4 second trial for ignition with Propane "15" or "90" tab broken.
Ign 60min Delay (Propane Tab Not Broken)	After 3 failed ignition attempts, the heater will lock out for 60 minutes before retrying.
EOL	End of Line Test. Mode button stuck in closed position.

REMOTE CONTROL INSTALLATION AND OPERATION

CAUTION: Before installing remote controls to the heaters, read the following:
The digital thermostat model is remote-ready in most cases. The digital liquid crystal display (LCD) shows the actual pool temperature, operating status, and service codes (See examples below). The touch pad on the control panel allows you to select the desired pool or spa temperature. It also indicates when a remote system is controlling the heater by displaying **Remote** in the display. When connecting the heater to a remote system, identify whether it is a two- or three-wire remote system. Select the appropriate instruction listed below to properly install the remote to the heater.



OFF Mode



Heating in the POOL Mode



Heating in the SPA Mode



Remote Mode

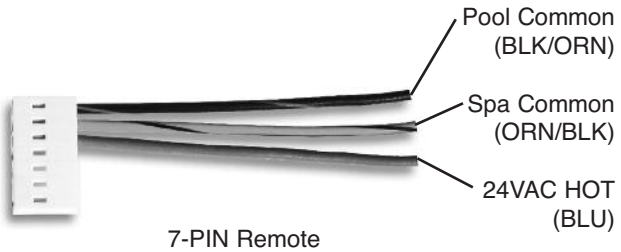

7-PIN Remote
Interface Harness

REMOTE OPERATION

The heaters are equipped with the ability to work with external remote controls. The supplied 7-pin remote wiring connector supplies power out to either a toggle switch or the switch contacts of a third party remote. The remote works by either making or breaking the circuit created by the remote wiring. Typically, a remote does not supply power to the heater, it only provides a switching function to turn the heater On or Off. **If your remote is supplying its own voltage to the heater, it will not work with this heater and may damage the digital circuit board.**

For operation of the heater using the onboard thermostatic controls with a time clock, see the “Time Clock / Fireman’s Switch” section.

ACTIVATING THE REMOTE

To activate or deactivate the remote function, follow these steps:

Press and hold the UP and DOWN arrow buttons for 3 to 5 seconds.

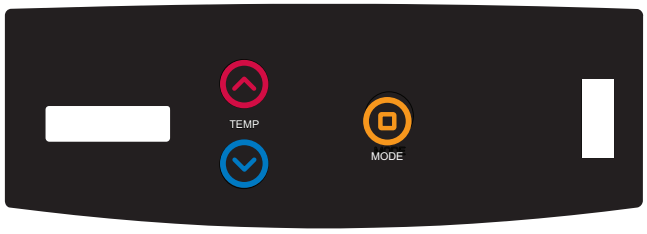

The second line of the display will alternate even when the unit is off (“No Demand”).



NOTE: When in remote operation, the keypad mode and temp buttons are disabled.

Note: *Electrostatic Discharge (ESD) damage can be caused by direct or indirect contact with the wiring or circuit board. When one walks to the heater area, an electrostatic charge accumulates on the body. Contact of a finger allows the body to discharge, possibly causing device damage. This damage can be limited if the service person discharges himself, following ESD preventive/removal practices, and holds on to the heater enclosure for 5 seconds before proceeding.*

REMOTE CONTROL WIRING

Important Installation Notes for Remote or External Wiring Configuration

- Remote wiring must be run in a separate conduit.
- Remote wiring must not be run parallel to high voltage lines.
- For runs of under 30 feet, remote wiring should have stranded conductors with a minimum of 22 AWG, 600V, cable twisting 1.5 to 2.5 in. lay and jacketed.
- For runs over 30 feet, the conductors should be a minimum of 20 AWG, 600V, cable twisting 1.5 to 2.5 inch lay that is shielded and jacketed.
- Maximum cable length is 200 feet.
- For both two- and three-wire remote systems, the provided 7-pin wiring connector must be utilized. Please refer to the wiring instructions.

NOTE: The remote wires must be connected to the 7-pin connector **before** the connector is plugged into the board.

2-Wire Remote Control (On-Off)

This application assumes that only one heating function (pool or spa) is required.

1. Turn on power to the heater.
2. For a 2-Wire Remote Control from a remote without its own sensor, push the mode button to the “POOL” or “SPA” mode and set the desired setpoint (eg. 102 °F for Spa).
3. For a 2-Wire Remote Control from a remote with its own sensor, push the mode button “POOL” or “SPA” mode and set the temperature to the highest setting available on the control. The actual setpoint will be controlled by the remote control.
4. Turn the mode button to "OFF" and remove power from the heater.
5. On the "Remote Interface Harness", connect the BLUE wire to one side of the "REMOTE" switch and connect the other side to either the ORANGE/BLACK wire for "SPA" operation or the BLACK/ORANGE wire for "POOL" operation.
6. Attach wire nut on unused wire to the "Remote Interface Harness."
7. Install the "7-Pin Remote Interface Harness" to the P8 connector and turn power “ON” to the heater.

To activate the remote control, see page 38.

3-Wire Remote Control Using Three-Position Switch (Pool-Off-Spa, or Low-Off-High)

This application assumes that both heating functions (pool and spa) are required.

1. Turn on power to the heater.
2. Push the mode button to the "POOL" or "SPA" mode and set the desired temperature for each (eg. 80°F for Pool and 102°F for Spa).
3. Turn the mode button to "OFF" and remove power from the heater.
4. On the "Remote Interface Harness" connect the BLUE wire to one side of the "REMOTE" switch and connect the ORANGE/BLACK wire for "SPA" operation and the BLACK/ORANGE wire for the "POOL" operation.
5. Install the "Remote Interface Harness" to the P8 connector and turn power "ON" to the heater.

To activate the remote control, see page 38.

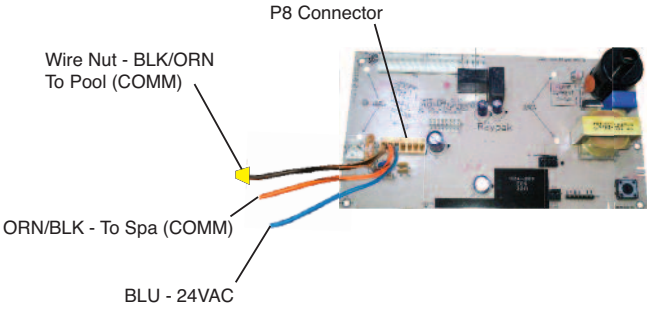

2-Wire Remote Control

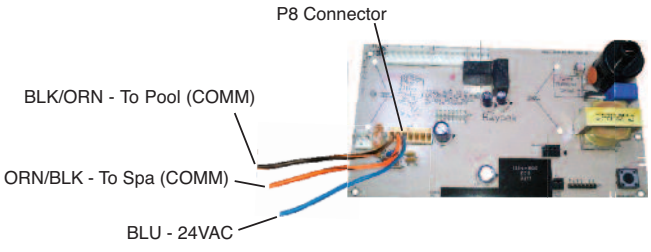

3-Wire Remote Control

TIME CLOCK/FIREMAN'S SWITCH

To operate the heater with a time clock, connect the timer to the fireman's switch connection in the heater's wiring. The time clock should be of the dual switch type and set to shut off the call for heat to the pool heater 15 to 20 minutes prior to shutting down the pool pump. The fireman's switch connection is located on the 6-pin header connected to the digital control board. Splice into the red wire jumper tagged "Where necessary add "Fireman's" switch circuit here" to connect the time clock. **The fireman's switch connection must be a dry contact and must not supply power to the heater. Powering the fireman's switch connection externally may damage the heater, and is <u>not</u> covered by warranty.**

Do not exceed 50ft of total wiring using 18 AWG stranded copper wire rated for 105ºC (221ºF) minimum.

NOTE: *When using a time clock, the heater will display "**Clock/ Fireman Sw**" when the fireman's switch is open, indicating that the time clock has shut off the call for heat.*

HIGH LIMITS

The heater is equipped with two automatic high limits. Both are located in the inlet/outlet header. Both are set to open at 135°F.

NOTE: *An erratic high limit is often characteristic of an internal heat exchanger problem, e.g. scale build-up, defective bypass. Refer to Troubleshooting section (starting on page 42).*

HIGH LIMIT REMOVAL

1. Shut off main electrical power switch to heater.
2. Remove front door.
3. Remove defective high limit and replace with a new high limit.
4. Replace inspection panel.

FLOW SWITCH

This standard, dual-purpose control, mounted and wired in series with the main gas valve, shuts off heater in case of pump failure or low water flow.

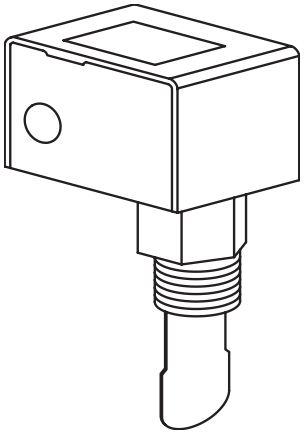

Flow Switch

AIR PRESSURE & BLOCKED VENT SWITCHES

This heater is equipped with an air pressure switch to prove the operation of the blower before allowing the ignition control to begin a Call for Heat. It is also equipped with a blocked vent pressure switch to prevent the operation of the heater when too much of the vent is blocked.

The two switches appear similar and are mounted next to each other on the heater. They can be distinguished by their mounted positions and by the pressure settings printed on the labels. See the figure below.

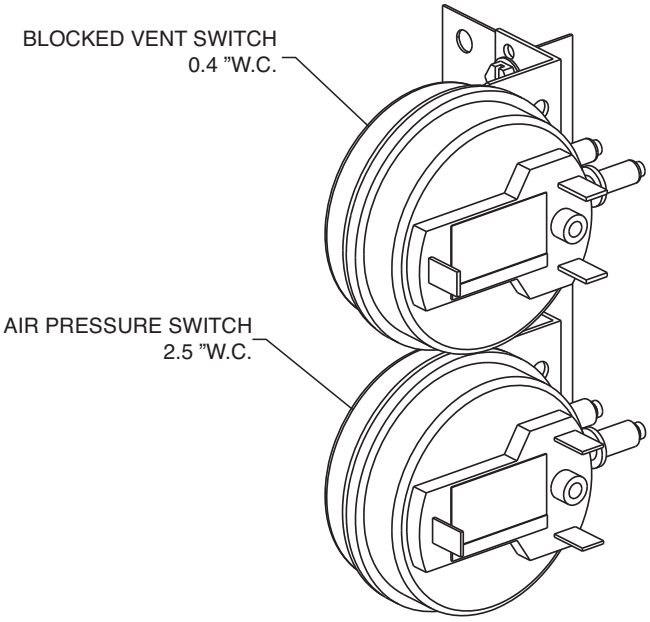

Air Pressure & Blocked Vent Switches

VISUAL INSPECTION

Flames can be observed through the sight glass reflection below the blower motor. A blue colored flame indicates normal operation. At least every three months a visual inspection should be made.

ELECTRICAL

Be sure that electrical service to the heater has proper overload fuse or circuit breaker protection, wire size and connections which comply with all applicable codes.

CAUTION: Prior to replacing any component, make sure that the main gas, power, and pumps are turned **OFF**.

ORIFICE REMOVAL

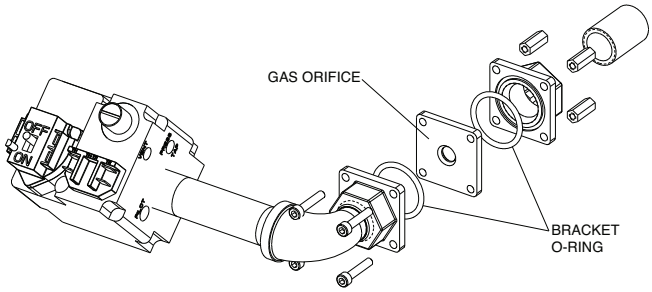

1. Locate and close the external manual shut-off valve.
2. Loosen the external gas union.
3. Locate and remove front door panel.
4. Locate and remove the (4) bolts & nuts holding the gas orifice in place. See the figure above.
5. Carefully remove the gas orifice and do not misplace the o-rings attached to the flanges.
6. Inspect and/or replace the orifice with the correct size.

GAS AND AIR ORIFICE SELECTION

The gas orifice and the air orifice **MUST** match to attain the correct air/fuel ratio. The orifices are matched when the number of pockets on the side of the gas orifice is the same as the number of notches on the edge of the air orifice.

The gas orifice is located on the gas train, between the gas valve and the combustion blower. The air orifice is located on the inlet side of the combustion blower.

NOTE: Orifices for propane gas have a black oxide finish.

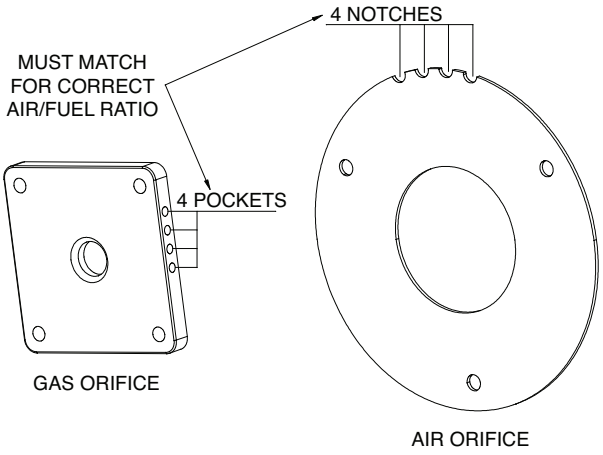

Pockets / Notches	Model	Elevation
1	409	0-2000 ft
2	259	0-2000 ft
3	409	2000-5000 ft
4	259	2000-5000 ft
5	409	5000-7000 ft
6	259	5000-7000 ft

IGNITER REMOVAL

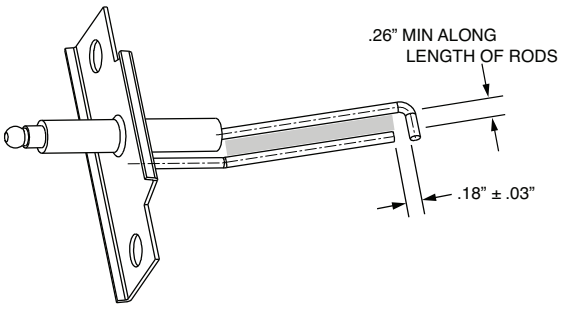

Igniter

1. Locate and remove front door panel.
2. Locate and remove the accessible left or right side access panel. If neither is accessible, you may either reach from the front of the heater or remove the jacket top for better access. See "Jacket Top Removal" for instructions.
3. Locate the igniter behind the blower.
4. Locate and disconnect the high tension spark cable from the igniter.
5. Using a 5/16" socket, remove the (2) bolts holding the igniter down.
6. Using a flat screw driver, loosen the igniter bracket from the combustion chamber, preferably on both sides.
7. Carefully remove the igniter from its location. The ceramic is fragile, so handle with care.
8. When replacing or inspecting the igniter, the gap between the ground & spark tips should be 0.18"± 0.03". The gap between the rods should be no less than .23" along their entire length.

SECTION 5 - TROUBLESHOOTING

MECHANICAL

IMPORTANT NOTICE These instructions are intended for the use of qualified personnel who are specifically trained and experienced in the installation of this type of heating equipment and related system components. Installation and service personnel may be required by some states to be licensed. Persons not qualified shall not attempt to install this equipment nor attempt repairs according to these instructions.

PROBLEM	CAUSE	SOLUTION
Harmonics, or whining noise	*Debris or restriction in system.....	Locate the restriction and remove. Flush system and clean.
	*Debris in gas line.....	Remove debris or blow out gas line.
	Low flow.....	Scale forming in heat exchanger - clean heat exchanger and check pool pH and total alkalinity.
Heater going on and off continuously	Dirty filter.....	Clean or replace filter.
	Low water level in pool.....	Raise water level.
	External bypass setting out of adjustment.....	Adjust bypass.
Valve opens but no flame visible	Manifold pressure too low……	Increase manifold pressure (turn clockwise slightly).
Flame visible for a split second	Ignition not being sensed……..	Replace ignition wire. Check connections.
Liming or scale forming in exchanger	Pool water.....	See Water Chemistry on page 2.
	Bypassing too much water.....	Inspect bypass for movement, if no movement, replace.
Sooting	High flow rates.....	Reduce by adding manual bypass valve. Adjust manual bypass valve until heater outlet water temperature is between 105°F and 110°F.
	*Air starvation.....	Refer to installation instructions.
	*Improper venting.....	Follow recommended installation instructions.
	*Insects or debris clogging burner intake ports.....	Clean burners.
Yellow lazy flame	Air intake clogged or incorrect fan operation.....	Check for debris upstream of fan intake. Verify Blower Suction Pressure, see page 5, is within range.
	*Insects or debris clogging burner intake ports.....	Clean burner.
Outer jacket very hot (paint blistered)	*Broken refractory caused by shipping damage or improper combustion.....	Replace refractory panels.
	Excessive sooting of heat exchanger....	Determine cause of sooting & correct.
Hard lighting at startup	Igniter faulty……	Replace igniter
Takes too long to heat pool or spa	Under-sized heater.....	Calculate heating capacity of heater or refer to heater sizing chart. Heating Capacity = $\frac{\text{Htr. output(BTUH)}}{\text{Pool gallonage x 8.33}}$ This does not take into account heat loss due to weather.
	Filter not running long enough.....	Reset time clock.
	Dirty filter.....	Clean filter.
	Gas line or meter undersized.....	Refer to installation instructions.
Leaking at well	Overacid.....	Replace well and maintain proper water chemistry.
Leaking at heat exchanger	Overacid.....	Replace heat exchanger and maintain proper water chemistry.
Gasket brittle and leaking - (overheated)	Heater running after pump shuts off....	See Pressure Switch Adjustment.
	Refractory damage.....	Replace refractory.
	Sooted heater.....	Determine cause of sooting and correct.
Combustion fan not running "Fan 5 min Delay" signal or "Fan Lockout" signal	Fan relay.....	Replace fan relay.
	Fan.....	Loose connection or failed motor.
	Burned motor	Incorrect wiring, replace blower.
	Air pressure switch.....	Replace air switch.
Heater turns on for less than 4 seconds (no display error)	Wiring.....	Check for loose or broken (verify continuity) wiring/ground/ignition wire.
	Incorrect supply wiring.....	Check incoming power for correct voltage. There should be no power on the neutral line.
	PC Board short.....	Replace board if no strength signal is being detected.

** Indicates symptom which usually occurs on initial start-up.*

CONTROL LOGIC - FLOW CHART

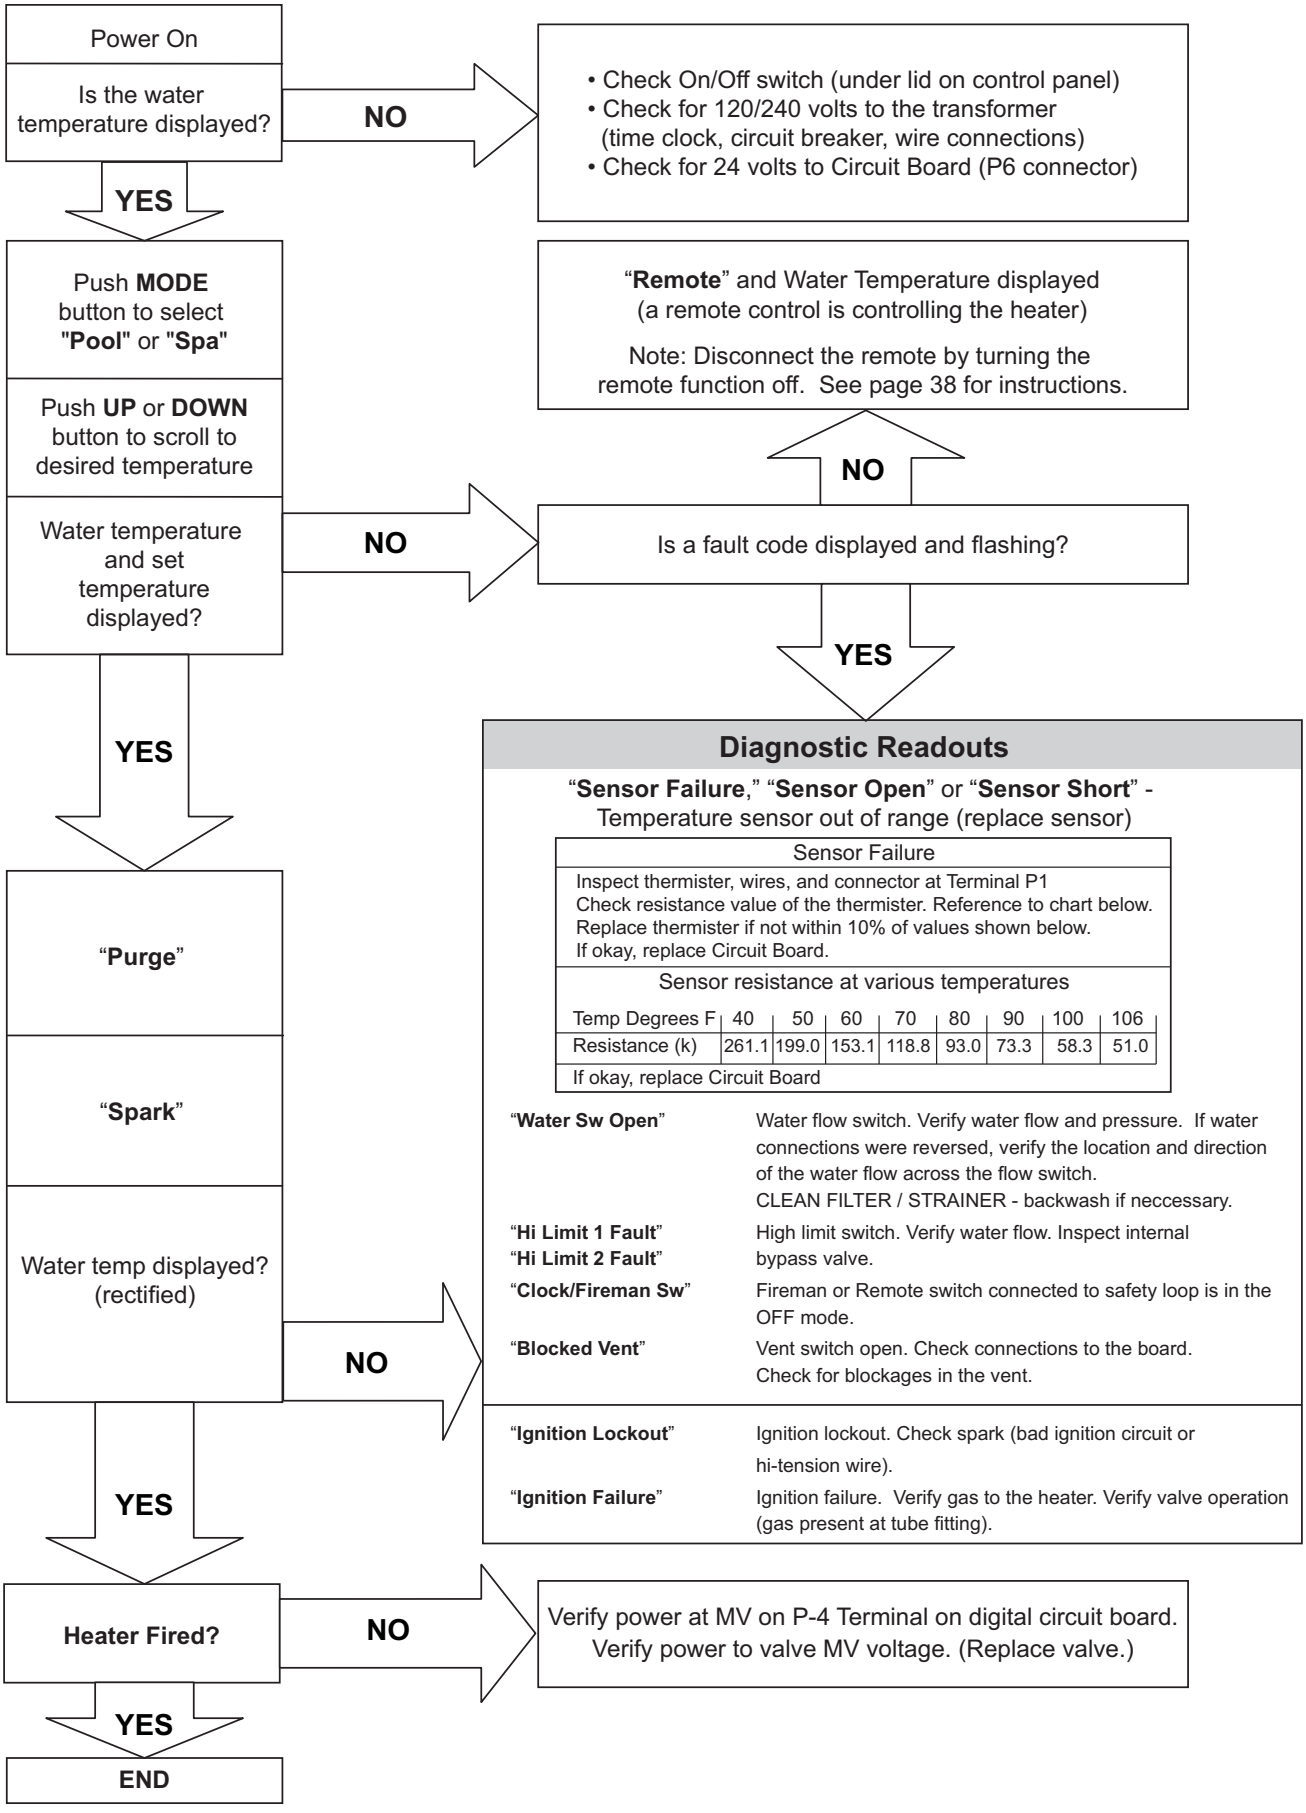
Power On
Is the water temperature displayed?
NO
• Check On/Off switch (under lid on control panel)
• Check for 120/240 volts to the transformer (time clock, circuit breaker, wire connections)
• Check for 24 volts to Circuit Board (P6 connector)
YES
Push MODE button to select "Pool" or "Spa"
Push UP or DOWN button to scroll to desired temperature
Water temperature and set temperature displayed?
NO
Is a fault code displayed and flashing?
"Remote" and Water Temperature displayed (a remote control is controlling the heater)
Note: Disconnect the remote by turning the remote function off. See page 38 for instructions.
NO
YES
YES
Diagnostic Readouts
"Sensor Failure," "Sensor Open" or "Sensor Short" - Temperature sensor out of range (replace sensor)
Sensor Failure
Inspect thermister, wires, and connector at Terminal P1
Check resistance value of the thermister. Reference to chart below.
Replace thermister if not within 10% of values shown below.
If okay, replace Circuit Board.
Sensor resistance at various temperatures
Temp Degrees F | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 106
Resistance (k) | 261.1 | 199.0 | 153.1 | 118.8 | 93.0 | 73.3 | 58.3 | 51.0
If okay, replace Circuit Board
"Water Sw Open" Water flow switch. Verify water flow and pressure. If water connections were reversed, verify the location and direction of the water flow across the flow switch. CLEAN FILTER / STRAINER - backwash if neccessary.
"Hi Limit 1 Fault" "Hi Limit 2 Fault" High limit switch. Verify water flow. Inspect internal bypass valve.
"Clock/Fireman Sw" Fireman or Remote switch connected to safety loop is in the OFF mode.
"Blocked Vent" Vent switch open. Check connections to the board. Check for blockages in the vent.
"Ignition Lockout" Ignition lockout. Check spark (bad ignition circuit or hi-tension wire).
"Ignition Failure" Ignition failure. Verify gas to the heater. Verify valve operation (gas present at tube fitting).
"Purge"
"Spark"
Water temp displayed? (rectified)
NO
YES
Heater Fired?
NO
Verify power at MV on P-4 Terminal on digital circuit board. Verify power to valve MV voltage. (Replace valve.)
YES
END

SECTION 6 - REPLACEMENT PARTS

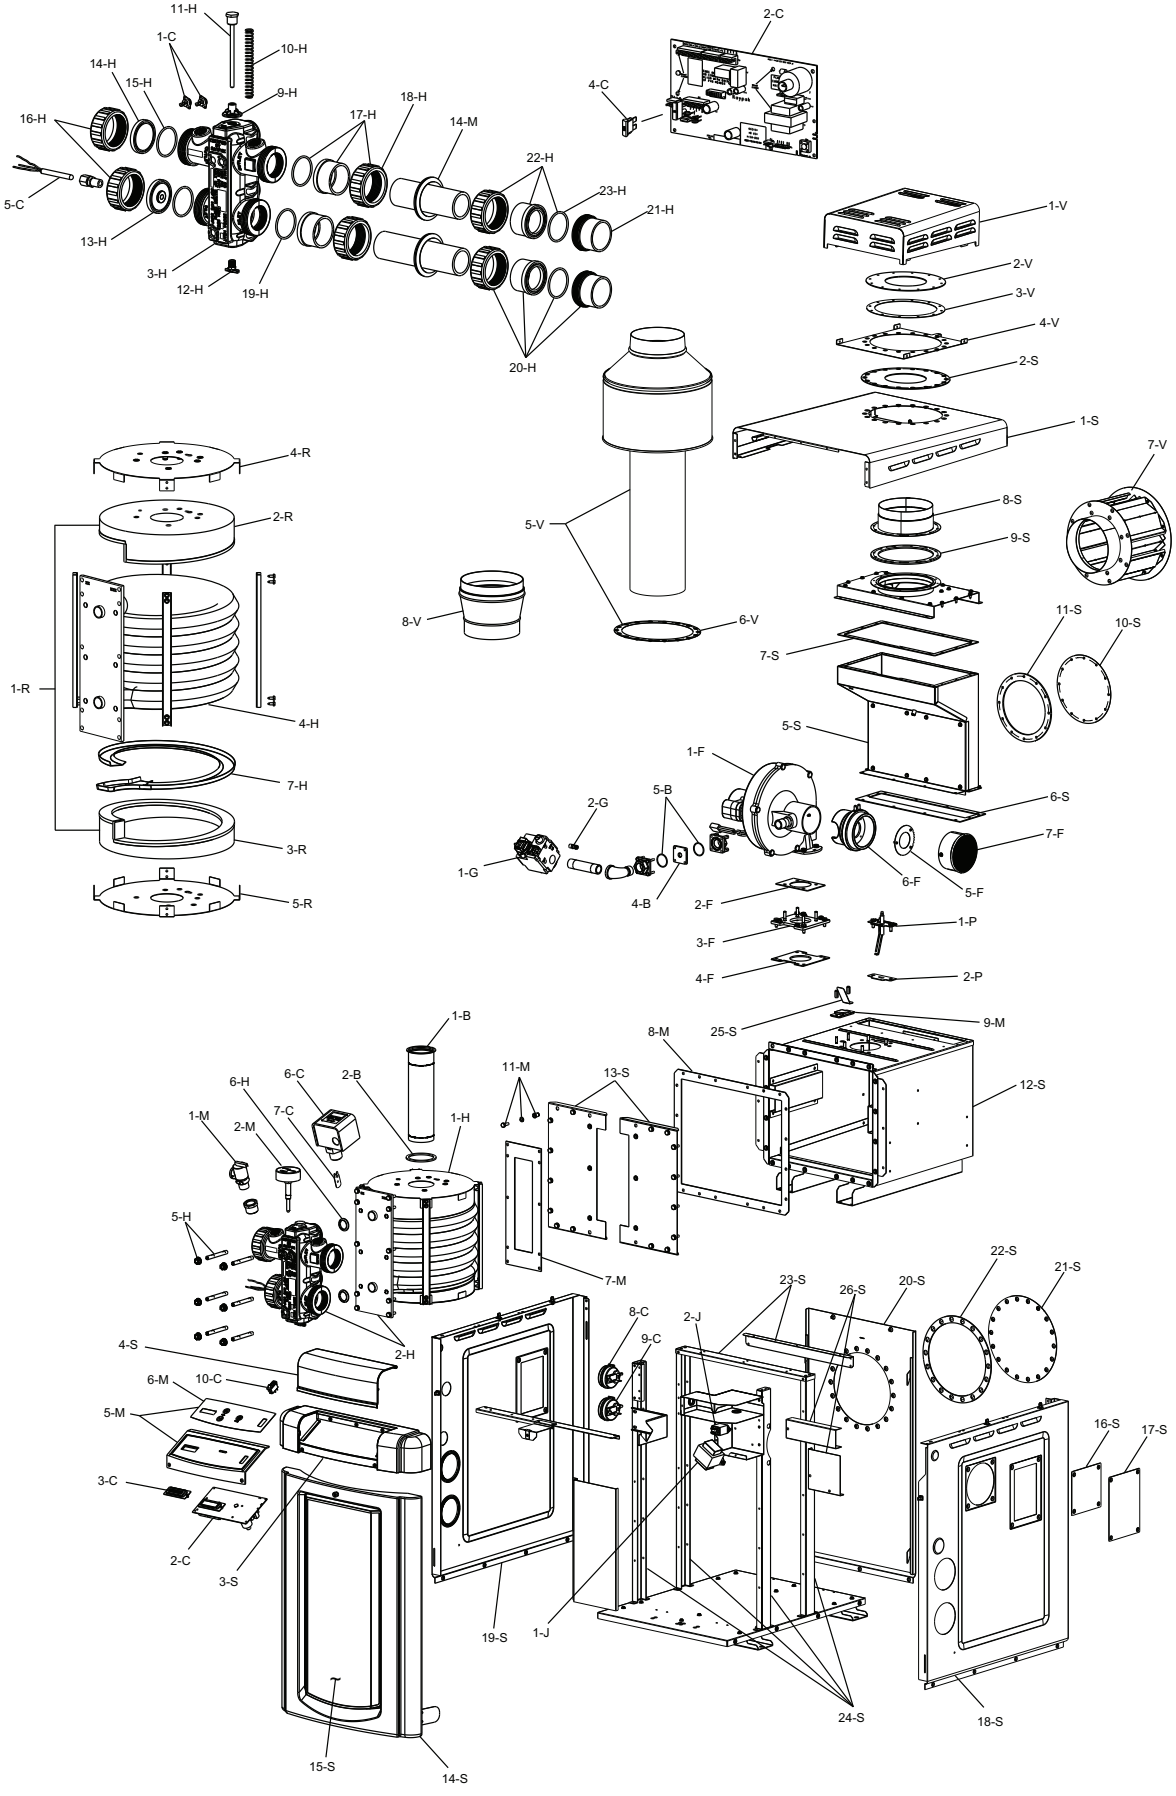

NOTE: To supply you with the correct part, it is important that you supply the heater model number, serial number and type of gas when applicable.

Any part returned for replacement under standard company warranties must be properly tagged with a return parts tag, completely filled in with the heater serial number, model number, etc., and shipped to the Company freight prepaid.

If determined defective by the Company and within warranty, a like part or equal substitution will be returned, freight collect. Credit will not be issued.

MANUFACTURER:

2151 EASTMAN AVENUE
OXNARD, CA 93030

CALL OUT	DESCRIPTION	259	409
B	**BURNER**		
1-B	Burner	014077F	014078F
2-B	Gasket seal	014079F	014079F
4-B	Gas Orifice Natural (0-2000 Ft)*	014082F	014081F
	Gas Orifice Natural (2000-5000 Ft)*	014084F	014083F
	Gas Orifice Propane (0-2000)*	014086F	014085F
	Gas Orifice Propane (2000-5000)*	014088F	014087F
5-B	Gas Orifice Flange O Ring	014089F	014089F
C	**CONTROLS**		
1-C	Thermostat Auto Reset 135 Deg Surface Mount	006725F	006725F
2-C	P. C. Board/Control	014090F	014090F
3-C	LCD Display	013640F	013640F
4-C	Fuse 5 AMP	013733F	013733F
5-C	Temperature Sensor	009577F	009577F
6-C	Flow Switch	007142F	007142F
7-C	Flow Switch Paddle	010026F	010026F
8-C	Switch Air Pressure (Vent)	007158F	007158F
9-C	Switch Air Pressure Differential (Blower)	011760F	011760F
10-C	Rocker Switch	009493F	009493F
F	**FAN**		
1-F	Blower	014091F	014091F
2-F	Blower Gasket	014092F	014092F
3-F	Mounting Plate	014093F	014093F
4-F	Mounting Plate Gasket	014080F	014080F
5-F	Combustion Air Orifice	014095F	014175F
6-F	Combustion Air Venturi Adapter	014096F	014096F
7-F	Intake Air Vent Cap	012844F	012844F
G	**GAS VALVE**		
1-G	Combination Valve - Nat.	014097F	014097F
	Combination Valve - Pro.	014097F	014097F
2-G	Bleedle Valve 1/8 NPT	007423F	007423F
H	**HEAT EXCHANGER**		
1-H	Heat Transfer (Includes Refractory)	014098F	014099F
2-H	Heat Exchange Assy.Cupro Nickel ASME BR	014100F	014101F
3-H	Inlet/Outlet Header ASME BR Complete	014102F	014103F
	Inlet/Outlet Header ASME BR	014104F	014105F
4-H	Tube Bundle Cupro Nickel ASME **	014106F	014107F
5-H	Stud Bolt Kit (6)	014108F	014108F
6-H	Header Gasket (2)	014109F	014109F
7-H	Condensate Channel	014110F	014110F
9-H	Bypass Valve	006716F	006716F
10-H	Bypass Spring	014112F	014113F
11-H	Bypass Shaft	014114F	014114F
12-H	Drain Valve 1/4 NPT	014158F	014158F
13-H	Inlet CPVC Plug	014115F	014115F
14-H	Outlet CPVC Plug	014116F	014116F
15-H	O Ring	006724F	006724F
16-H	2" CPVC Nut	014160F	014160F
17-H	2" CPVC Connector & Nut	006723F	006723F
18-H	2" CPVC Nut	014160F	014160F
19-H	O Ring	006724F	006724F
20-H	2" PVC Union Adapter	014161F	014161F
21-H	Adapter with Buttress Threads	014162F	014162F
22-H	2" CPVC Connector & Nut	006723F	006723F
23-H	O Ring	006724F	006724F
J	**CONTROL BOX**		
1-J	Transformer 120/240/24V	006736F	006736F
2-J	Blower Relay DPDT 24V	011720F	011720F

*FOR INSTALLATION AT OVER 2,000 FEET ABOVE SEA LEVEL, DERATE 4% PER I,000 FEET ABOVE SEA LEVEL.
**WARNING: The Hydraulic conditions or water chemistry that caused the tube bundle to fail have very likely also damaged the bypass valve. We recommend to inspect the bypass assembly. Failure to do so could cause premature failure of this replacement part.

CALL OUT	DESCRIPTION	259	409
M	**MISCELLANEOUS COMPONENTS**		
1-M	PRV 125 PSI	011912F	011912F
2-M	T & P Gauge	007399F	007399F
3-M	Wire/Harness	014117F	014117F
4-M	Blower Harness 120V	014118F	014118F
	Blower Harness 240V	014119F	014119F
5-M	Control Bezel (Includes Switch Decal)	014120F	014120F
6-M	Switch/Decal-Membrane	014121F	014121F
7-M	Tube Sheet Gasket	014122F	014122F
8-M	Heat Exchanger Seal Gasket	014123F	014123F
9-M	Window Combustion Chamber	006947F	006947F
10-M	Blower / Air Pressure Switch Sample Tube	010348F	010348F
11-M	Fastener Kit (Includes 6 each Bolt, Washer & Nutsert)	014174F	014174F
12-M	Touch-up Paint Cool Dark Gray (Not Shown)	750256	750256
13-M	RTV Sealant 2.8 oz (Not Shown)	008924F	008924F
	RTV Sealant 10 oz (Not Shown)	005755F	005755F
14-M	Seal Gaskets	010780F	010780F
P	**PILOT**		
1-P	Igniter Direct Spark	014124F	014124F
2-P	Igniter Gasket	014125F	014125F
3-P	Hi Tension Wire	014126F	014126F
R	**REFRACTORY**		
1-R	Refractory Top & Bottom	014127F	014127F
2-R	Refractory Top	014128F	014128F
3-R	Refractory Bottom	014129F	014129F
4-R	Refractory Support Top	014130F	014130F
5-R	Refractory Support Bottom	014131F	014131F
S	**SHEET METAL / CABINET**		
1-S	Jacket Top	014132F	014132F
2-S	Flue Exhaust Gasket	014133F	014133F
3-S	Front Control Bezel	014134F	014134F
4-S	Control Bezel Cover	014135F	014135F
5-S	Flue Collector	014136F	014136F
6-S	Flue Collector Lower Gasket	014137F	014137F
7-S	Flue Collector Upper Gasket	014138F	014138F
8-S	Flue Exhaust Collar	009802F	009802F
9-S	Flue Exhaust Gasket	009735F	009735F
10-S	Flue Exhaust Cover Panel	009799F	009799F
11-S	Flue Exhaust Gasket	009735F	009735F
12-S	Chamber Assy	014139F	014140F
13-S	Front Panels Left & Right	014141F	014141F
14-S	Door Assy	014142F	014142F
15-S	Door Insert SS	014143F	014143F
16-S	Access Panel Intake Air	014144F	014144F
17-S	Access Panel Igniter	014145F	014145F
18-S	Jacket Side Panel Right	014146F	014146F
19-S	Jacket Side Panel Left	014147F	014147F
20-S	Jacket Rear Panel	014148F	014148F
21-S	Flue Exhaust Cover	014149F	014149F
22-S	Flue Exhaust Gasket	014290F	014290F
23-S	Upper Cabinet Supports	014150F	014150F
24-S	Vertical Cabinet Supports	014151F	014151F
25-S	Window Reflector	014152F	014152F
26-S	Control/Wiring Box Covers	014153F	014153F
V	**VENTING**		
1-V	Stackless Top	014154F	014154F
2-V	Flue Exhaust Gasket	014155F	014155F
3-V	Flue Exhaust Gasket Retainer	014156F	014156F
4-V	Retainer Stackless top Mtg	014157F	014157F
5-V	Outdoor Stack Kit	013978	013978
6-V	Flue Exhaust Gasket Retainer	010030F	010030F
7-V	Outdoor Horizontal Vent Kit 4"	014289	N/A
	Outdoor Horizontal Vent Kit 5"	014288	014288
	Outdoor Horizontal Vent Kit 6"	014159	014159
8-V	Flue Exhaust Outlet Adapter 6" x 7"	014050	014050
	Flue Exhaust Outlet Adapter 6" x 8"	014051	014051
	Flue Exhaust Outlet Adapter 6" x 9"	014052	014052
CONVERSION KITS*		**259**	**409**
	Nat. to Pro.	N/A	N/A
	Pro. to Nat.	N/A	N/A

*** Gas conversions are to be done only by a qualified agency.**

Important Instructions for the Commonwealth of Massachusetts

The Commonwealth of Massachusetts requires compliance with regulation 248 CMR 4.00 and 5.00 for installation of through – the – wall vented gas appliances as follows:

(a) For all side wall horizontally vented gas fueled equipment installed in every dwelling, building or structure used in whole or in part for residential purposes, including those owned or operated by the Commonwealth and where the side wall exhaust vent termination is less than seven (7) feet above finished grade in the area of the venting, including but not limited to decks and porches, the following requirements shall be satisfied:

1. INSTALLATION OF CARBON MONOXIDE DETECTORS. At the time of installation of the side wall horizontal vented gas fueled equipment, the installing plumber or gasfitter shall observe that a hard wired carbon monoxide detector with an alarm and battery back-up is installed on the floor level where the gas equipment is to be installed. In addition, the installing plumber or gasfitter shall observe that a battery operated or hard wired carbon monoxide detector with an alarm is installed on each additional level of the dwelling, building or structure served by the side wall horizontal vented gas fueled equipment. It shall be the responsibility of the property owner to secure the services of qualified licensed professionals for the installation of hard wired carbon monoxide detectors

a. In the event that the side wall horizontally vented gas fueled equipment is installed in a crawl space or an attic, the hard wired carbon monoxide detector with alarm and battery back-up may be installed on the next adjacent floor level.

b. In the event that the requirements of this subdivision can not be met at the time of completion of installation, the owner shall have a period of thirty (30) days to comply with the above requirements; provided, however, that during said thirty (30) day period, a battery operated carbon monoxide detector with an alarm shall be installed.

2. APPROVED CARBON MONOXIDE DETECTORS. Each carbon monoxide detector as required in accordance with the above provisions shall comply with NFPA 720 and be ANSI/UL 2034 listed and IAS certified.

3. SIGNAGE. A metal or plastic identification plate shall be permanently mounted to the exterior of the building at a minimum height of eight (8) feet above grade directly in line with the exhaust vent terminal for the horizontally vented gas fueled heating appliance or equipment. The sign shall read, in print size no less than one-half (1/2) inch in size, "GAS VENT DIRECTLY BELOW. KEEP CLEAR OF ALL OBSTRUCTIONS".

4. INSPECTION. The state or local gas inspector of the side wall horizontally vented gas fueled equipment shall not approve the installation unless, upon inspection, the inspector observes carbon monoxide detectors and signage installed in accordance with the provisions of 248 CMR 5.08(2)(a)1 through 4.

(b) EXEMPTIONS: The following equipment is exempt from 248 CMR 5.08(2)(a)1 through 4:

1. The equipment listed in Chapter 10 entitled "Equipment Not Required To Be Vented" in the most current edition of NFPA 54 as adopted by the Board; and

2. Product Approved side wall horizontally vented gas fueled equipment installed in a room or structure separate from the dwelling, building or structure used in whole or in part for residential purposes.

(c) MANUFACTURER REQUIREMENTS - GAS EQUIPMENT VENTING SYSTEM PROVIDED. When the manufacturer of Product Approved side wall horizontally vented gas equipment provides a venting system design or venting system components with the equipment, the instructions provided by the manufacturer for installation of the equipment and the venting system shall include:

1. Detailed instructions for the installation of the venting system design or the venting system components; and

2. A complete parts list for the venting system design or venting system.

(d) MANUFACTURER REQUIREMENTS - GAS EQUIPMENT VENTING SYSTEM NOT PROVIDED. When the manufacturer of a Product Approved side wall horizontally vented gas fueled equipment does not provide the parts for venting the flue gases, but identifies "special venting systems", the following requirements shall be satisfied by the manufacturer:

1. The referenced "special venting system" instructions shall be included with the appliance or equipment installation instructions; and

2. The "special venting systems" shall be Product Approved by the Board, and the instructions for that system shall include a parts list and detailed installation instructions.

(e) A copy of all installation instructions for all Product Approved side wall horizontally vented gas fueled equipment, all venting instructions, all parts lists for venting instructions, and/or all venting design instructions shall remain with the appliance or equipment at the completion of the installation.

www.raypak.com

Raypak, Inc., 2151 Eastman Avenue, Oxnard, CA 93030 (805) 278-5300 Fax (805) 278-5468
Litho in U.S.A.